

DIN 41612 Series





KLS1-D2Q 2x10Pin Two row Short B Type

Electrical:


Contact Resistance: 30 mΩ Max. Insulator
 Insulation Resistance: 1000 MΩ Min. at 500 VDC
 Withstand Voltage: 1000 VAC for 1 minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55°C~+105°C

Material:

Insulator: Glass-filled thermoplastic PBT UL94V-0
 Contacts: Male-Brass / Female-Phosphor Bronze
 Plating: full gold or selected gold in mating area.

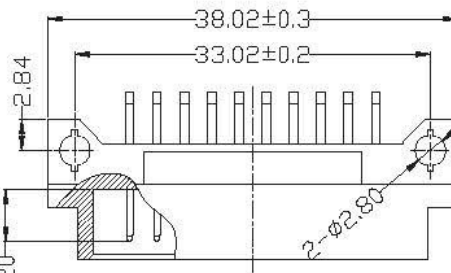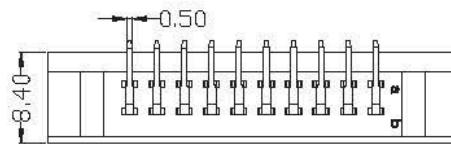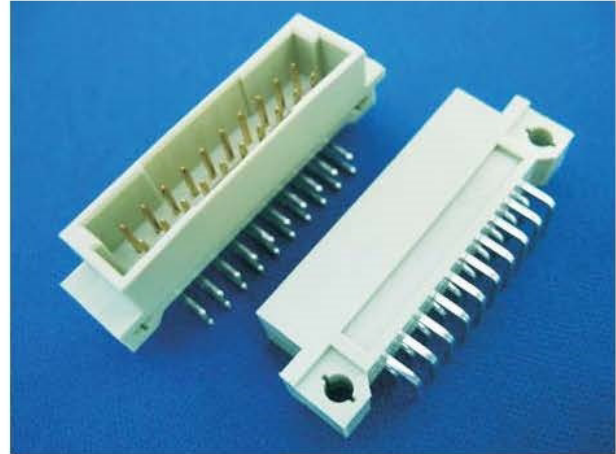

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	20	a b		2220
	10	a -		2110
5.08mm	10	a b		2210
	05	a -		2105

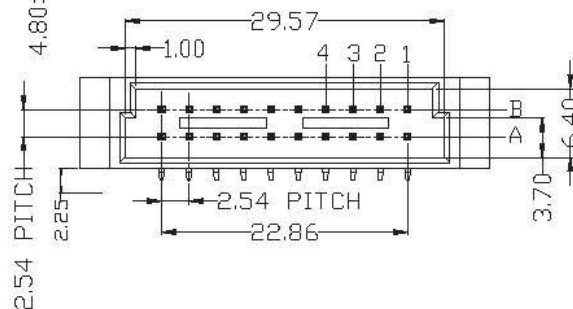

ORDER INFORMATION

Product No.: KLS1-D2Q-2220-MR

Pos. No. _____
 Din41612 2x10Pin Two row Short Type _____
 Part Number: 2220 / 2110 / 2210 / 2105 _____

Tail Style: S-4.0mm Straight pin
 W1-13mm Straight pin
 R-Right pin
 Contact Type: M=Male F=Female