

## DIN 41612 Series






### KLS1-D2X 2x16Pin Two row Short B Type

#### Electrical:

Contact Resistance: 30 mΩ Max. Insulator  
 Insulation Resistance: 1000 MΩ Min. at 500 VDC  
 Withstand Voltage: 1000 VAC for 1 minute  
 Current Rating: 2 AMP  
 Voltage Rating: 250 VAC  
 Operating Temperature: -55°C~+105°C

#### Material:

Insulator: Glass-filled thermoplastic PBT UL94V-0  
 Contacts: Male-Brass / Female-Phosphor Bronze  
 Plating: full gold or selected gold in mating area.

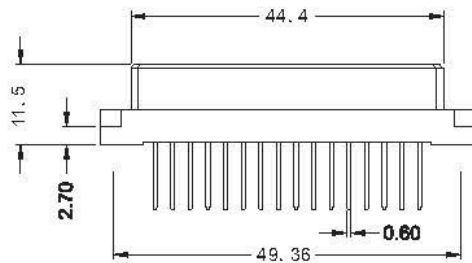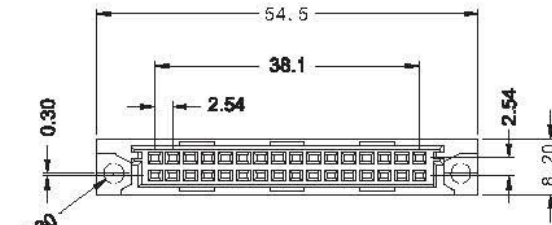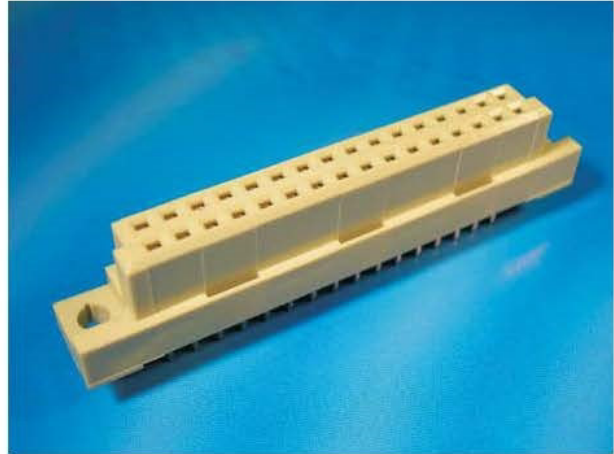

PCB Layout

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	32	a b		2232
	16	a -		2116
5.08mm	16	a b		2216
	08	a -		2108

## ORDER INFORMATION

Product No.: KLS1-D2X-2232-F W1

Pos. No. \_\_\_\_\_ Tail Style: S-4.0mm Straight pin  
 Din41612 2x16Pin Two row Short Type \_\_\_\_\_ W1-13mm Straight pin  
 Part Number: 2232 / 2116 / 2216 / 2108 \_\_\_\_\_ R-Right pin  
 Contact Type: M=Male F=Female