

DIN 41612 Series


KLS1-D2X 2x16Pin Two row Short B Type

Electrical:

Contact Resistance: 30 mΩ Max. Insulator
Insulation Resistance: 1000 MΩ Min. at 500 VDC
Withstand Voltage: 1000 VAC for 1 minute
Current Rating: 2 AMP
Voltage Rating: 250 VAC
Operating Temperature: -55°C~+105°C

Material:

Insulator: Glass-filled thermoplastic PBT UL94V-0
Contacts: Male-Brass / Female-Phosphor Bronze
Plating: full gold or selected gold in mating area.

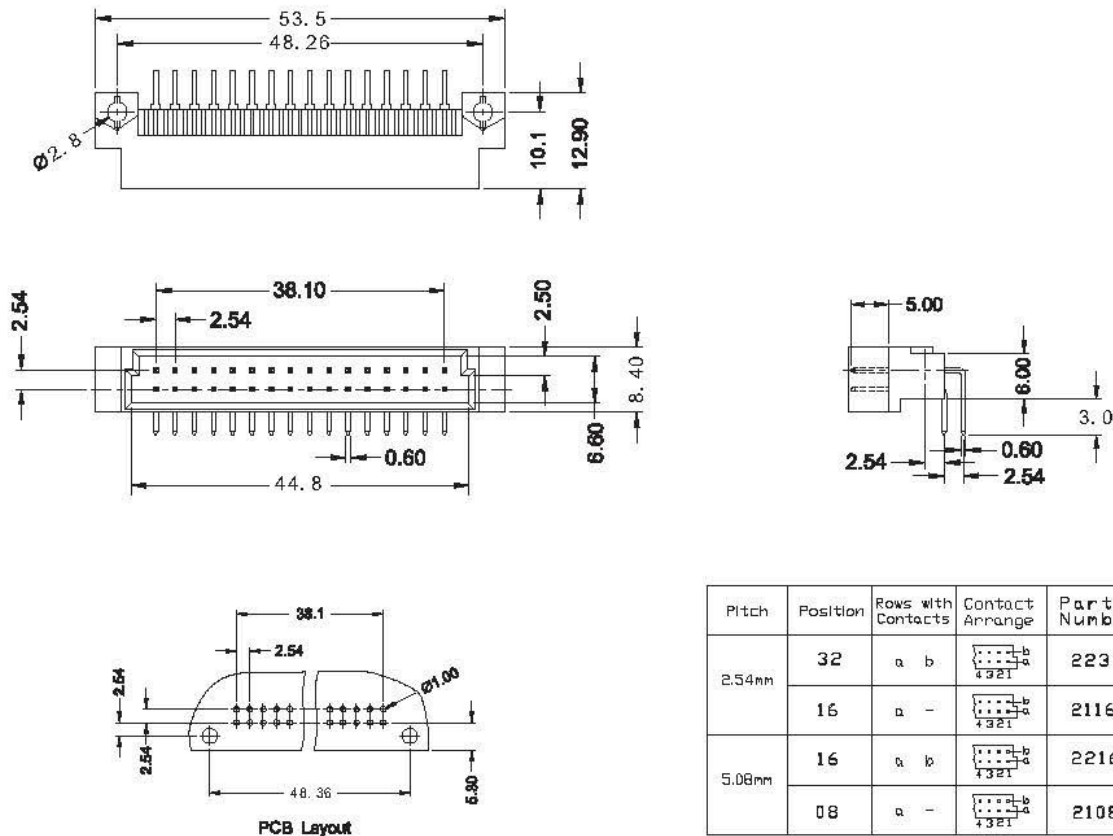

ORDER INFORMATION

Product No.: KLS1-D2X-2232-MR

Pos. No. _____ Tail Style: S-4.0mm Straight pin
 Din41612 2x16Pin Two row Short Type _____ W1-13mm Straight pin
 Part Number: 2232 / 2116 / 2216 / 2108 _____ R-Right pin
 Contact Type: M=Male F=Female