

Connector

DIN 41612 Series






KLS1-D3 3X32Pin 3 row Long R Type

Electrical:

Contact Resistance: 30 mΩ Max. Insulator
 Insulation Resistance: 1000 MΩ Min. At 500 VDC
 Withstand Voltage: 1000 VAC for 1 minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55 °C ~ +105 °C

Material:

Insulator: Glass-filled thermoplastic PBT UL94V-0
 Contacts: Male-Brass / Female-Phosphor Bronze
 Plating: full gold or selected gold in mating area.

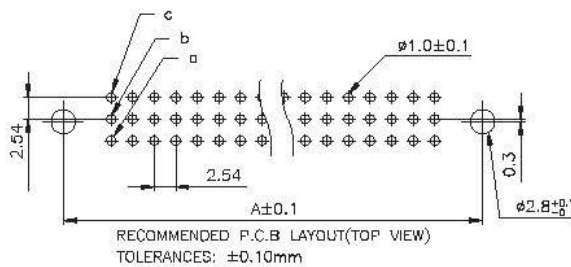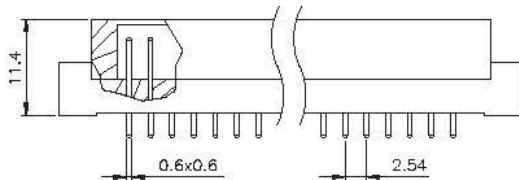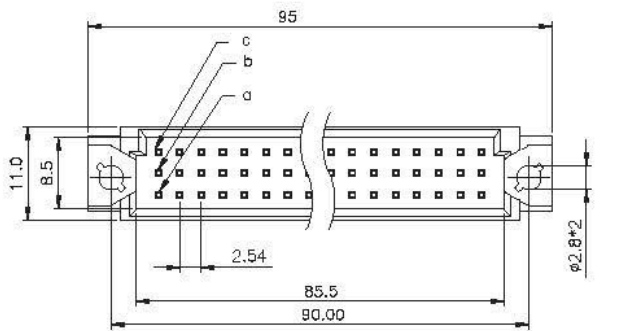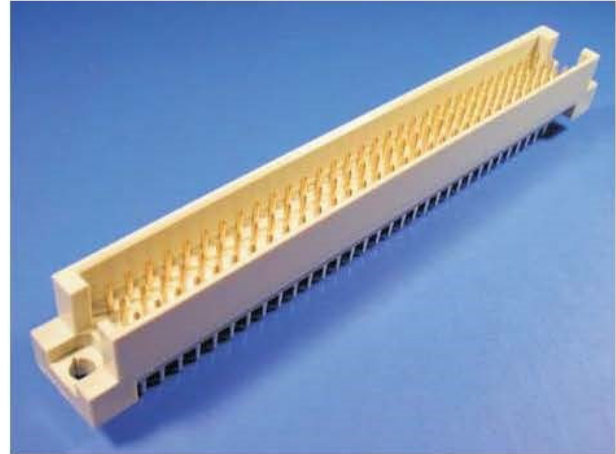

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	96	a b c		3396
	64	a - c		3264
5.08mm	48	a b c		3348
	32	a - c		3232

ORDER INFORMATION

Product No.: KLS1-D3-3396-MS

Pos. No. _____
 3X32Pin 3 row Long Type _____
 Part Number: 3396 / 3264 / 3348 / 3232 _____

Tail Style: S -4.0mm Straight pin
 W1-13mm Straight pin
 R -Right pin
 Contact Type: M=Male Plug
 F=Female Receptacle