

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

△ SPECIFICATION

MATERIAL

Insulator: PBT, rated UL94V-0 (standard)

Contacts: Brass (Male)

Phosphor Bronze (Female)

Shell: Steel

Rivet, Boardlock: Copper alloy

△ CONTACT PLATING

Underplate: 50u" Nickel

Contact area: 1u"~30u" Selective Gold

Solder tails area: 100u" Tin/Lead

ELECTRICAL

Operation voltage: 250 VAC max.

Current rating: 1 Amps max.

Contact resistance: 20 mohms max.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55°C TO +125°C

RoHS Compliant

All Connectors

www.allconnectors.de

Tel.: 0049 711 7009503

71149 Hilderstadt - Germany

info@allconnectors.de

Fax: 0049 711 7009504

Kartenmarkt, 25

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

TOLERANCES ARE


X ±

.X ±


.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

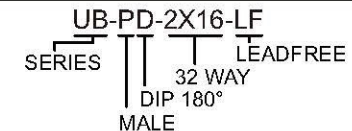

DESCRIPTION: DIN 41612 HAIF TYPE PRESS FIT 2 ROW MALE