

**Material**

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

**Electrical Characteristics**

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.




Insulator Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C.

Nickel thickness: 50~120u"

**\*RoHS Compliant**

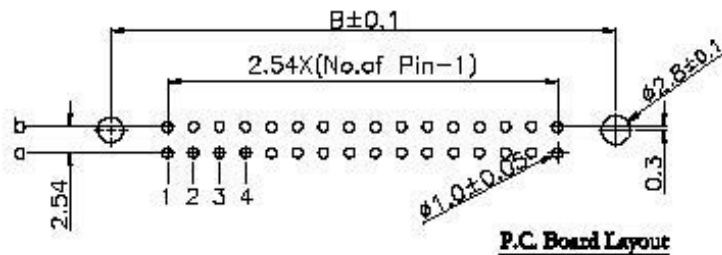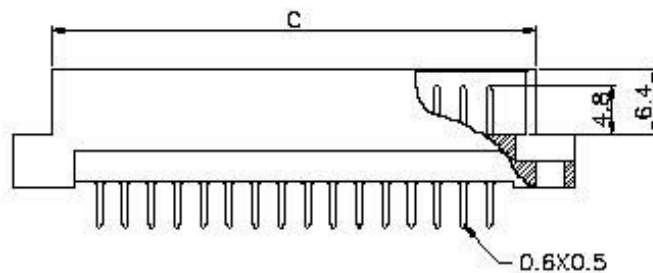


Position	A	B	C	D
20	39.76	34.12	32.16	29.36
Pinch	Position	Rows with Connects	Contact Arrange	P/N
2.54mm	20	a b		UB-PD-2X10

**All Connectors**

www.allconnectors.com  
 Tel: 0049 2170 9090  
 87711 Gredde, Germany

**RoHS Compliant**


DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT/mm SCALE 1:1  
 DATE  
 SIZE A4 PROJECTION 

TOLERANCES ARE

X±  
 XX±  
 XXX±  
 ANG±



**ORDER INFORMATION**

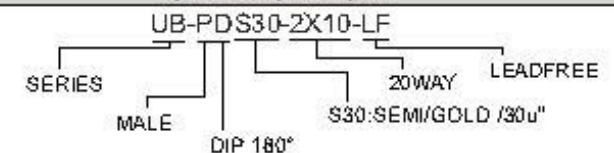

**DESCRIPTION:**