

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Brass.

Lock: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω Min. at DC 500V.

Contact Resistance: 30m Ω Max. at DC 100mA.

Operating Temperature: -55°C ~+105°C .

***RoHS Compliant**

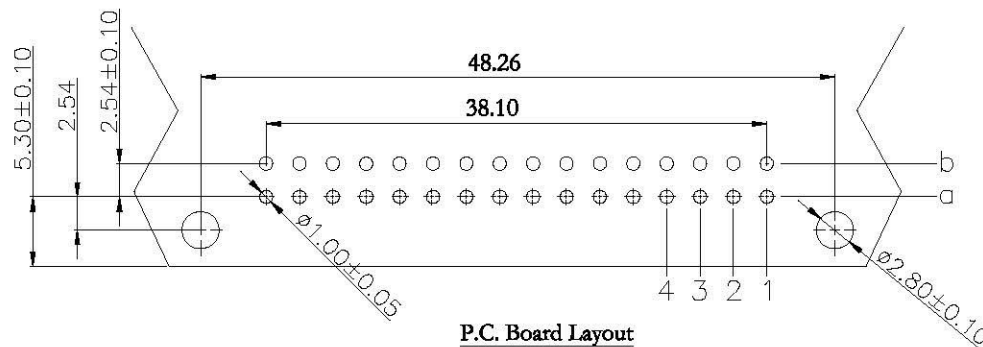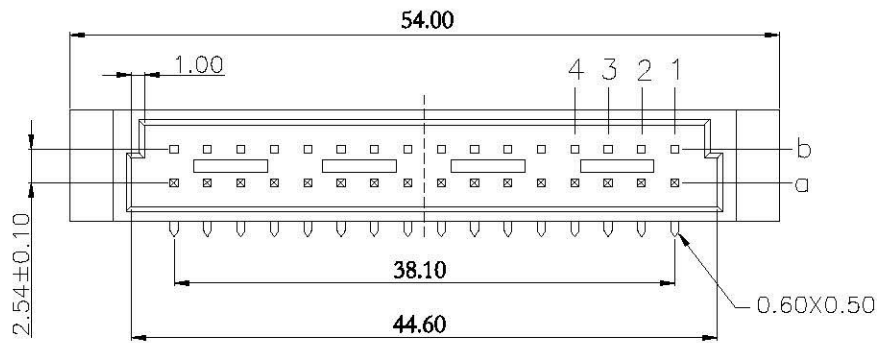

P.C. Board Layout

RoHS Compliant


All Connectors

www.allconnectors.com
 info@allconnectors.com
 Tel: 0049 711 909003
 Fax: 0049 711 909001
 All 184 Hildebrandt - Germany
 Kerkstra. 2


DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE

X ±
 X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

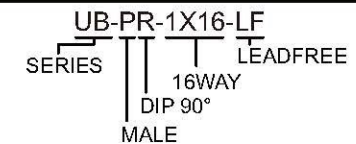

DESCRIPTION: