

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: ±0.10mm

SPECIFICATION

MATERIAL

Insulator: PBT & glass fiber , rated UL94V-0

Contacts: Brass Gold plated

CONTACT PLATING

S=1u" gold on mating length, 100u" tin on solder tails base nickel=40u"

G=gold flash

A=5u" gold(selective)

B=10u" gold(selective)

C=15u" gold(selective)

D=30u" gold(selective)

RoHS Compliant



www.allconnectors.de
Tel.: 0049 711 7009503
70754 Filderstadt - Germany


info@allconnectors.de
Fax: 0049 711 7009504
Kontaktmertr: 25

DRAWING BY CY		X ± X ± 0.30 .XX ± 0.20 .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	P PROJECTION	

TOLERANCES ARE



ORDER INFORMATION

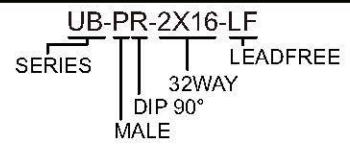

DESCRIPTION: DIN 41612 (DUAL ROW) MALE 32PIN