

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

SPECIFICATION

MATERIAL
 Insulator: PBT & glass fiber , rated UL94V-0
 Contacts: Brass Gold plated
CONTACT PLATING
 S=1u" gold on mating length, 100u" tin on solder tails base nickel=40u"
 G=gold flash
 A=5u" gold(selective)
 B=10u" gold(selective)
 C=15u" gold(selective)
 D=30u" gold(selective)

All Connectors

www.allconnectors.de info@allconnectors.de
 Tel: 0049 7141 708628 Fax: 0049 7141 708629
 70724 Tübingen, Germany De.Jensenstr. 25


RoHS Compliant

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	P PROJECTION

TOLERANCES ARE	
X ±	.X ± 0.30
.XX ±	.XX ± 0.20
.XXX ±	.XXX ±
ANG ±	ANG ±



ORDER INFORMATION

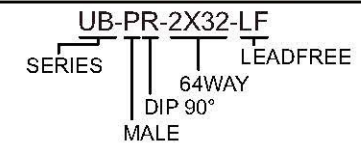

DESCRIPTION: DIN 41612 (DUAL ROW) MALE 64PIN