

P.C. Board Layout

Material:

Housing: 30% Glass Filled PBT UL94V-0.
 Contacts: Phosphor Bronze
 Lock: Phosphor Bronze

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~ +105°C .
 Nickel thickness: 50~120μ

***RoHS Compliant**

RoHS Compliant

All Connectors

www.allconnectors.de info@allconnectors.de
 TEL: +0049 711 400510 FAX: +0049 711 400510
 WUPF-Idarstadt - Germany GETEMATIC 25


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/mm SCALE 1:1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE

X ±
 XX ±
 XXX ±
 ANG ±



ORDER INFORMATION

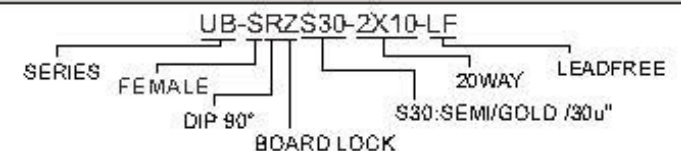

DESCRIPTION: