


Technial data  
 EURO DIN 41612:  
 Housing:  
 Contact:  
  
 Plating:  
 Operating temperature:  
 Contact resistance:  
 Insulator resistance:  
 Current rating:  
 Withstanding voltage:  
 Contact Rating:  
 RoHS Compliant

Signal  
 PBT & 30%Class Fiber(UL94-0)  
 Male : Brass  
 Female : Phosphor Bronze  
 Tin-plated on tail  
 -55°C~+105°C  
 30m(ohm)max.at DC 500V  
 1000M(ohm)min.at DC 500V  
 2 AMP  
 AC 1000V for 1 minute  
 Class 2

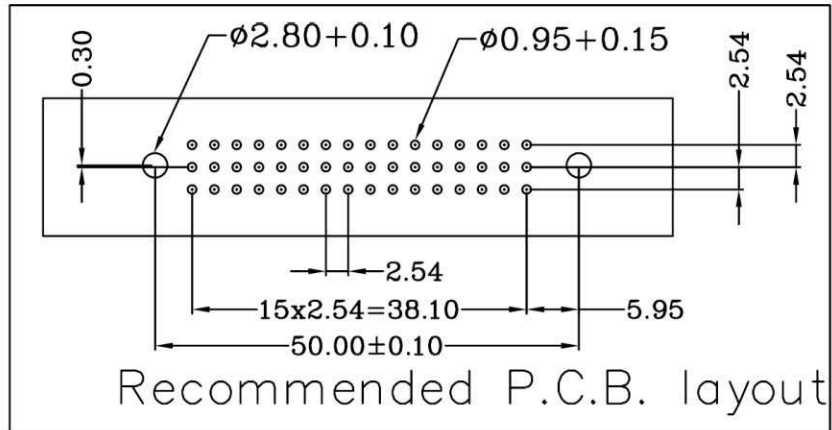

**UC-PDZS15-3X16-LF**  
**LEADFREE**  
**S15:SEMI GOLD 15u**

**Allconnectors**

www.allconnectors.de  
 info@allconnectors.de  
 Tel: +49 411 403503  
 Fax: +49 411 403501  
 70794 Rildersdorf, Germany  
 Kellernstr. 25

PART NO. UC-PDZS15-3X16

DWG NO. UC-PDZS15-3X16

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2  
 .XX ±  
 .XXX ±  
 AWG

AREA	REVISIONS	HK	DATE
------	-----------	----	------

UNIT / mm SCALE 1:1

PROJECTION

