

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: ±0.05mm

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Rivet,Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u"~100u" Nickel

Contact Area: 1u"~30u" Selective Gold

Solder Tails Area: 100u"~200u" Tin(Lead Free)

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating:

TEMP(°C)	20	70	100
CURRENT	2.0A	1.8A	1.0A

Contact Resistance: 20 Mohms Max.

Insulation Resistance: 3000 Mohms Min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute

Temperature Range: -55°C TO +125°C

RoHS Compliant




www.allconnectors.com
Tel: 0049 711 3009500
70724 Tüdingen - Germany

info@allconnectors.com
Fax: 0049 711 3009504
Kettnerstr. 25

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	X ±
DATE		.X ±
SIZE A4	PPOJECTION	.XX ±
		.XXX ±
		ANG ±



ORDER INFORMATION

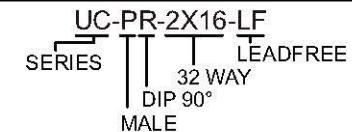

DESCRIPTION: