

RECOMMENDED P.C.B LAYOUT(TOP VIEW)  
TOLERANCES: ±0.10mm

**SPECIFICATION**

**MATERIAL**

Insulator: PBT & glass fiber , rated UL94V-0

Contacts: Brass

**CONTACT PLATING**

S=1u" gold on mating length, 100u" tin on solder tails base nickel=40u"

G=gold flash

A=5u" gold(selective)

B=10u" gold(selective)

C=15u" gold(selective)

D=30u" gold(selective)

**RoHS Compliant**

**All Connectors**

www.allconnectors.de  
tel.: 0049 711 4005003  
70734 Hilberstadt - Germany

info@allconnectors.de  
fax: 0049 711 4005001  
Kettnerstr. 25

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

**TOLERANCES ARE**

X ±


.X ±

.XX ±


.XXX ±

ANG ±

P PROJECTION



**ORDER INFORMATION**

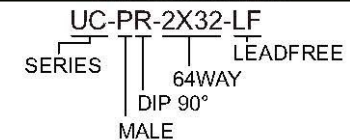

DESCRIPTION: