

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

SPECIFICATION

MATERIAL

Insulator: PBT, rated UL94V-0 (standard)
Contacts: Brass (Male) ; Phosphor Bronze (Female)
Rivet,Boardlock: Copper alloy

CONTACT PLATING

Underplate: 50m² Nickel
Contact area: 1m²~30m² Selective gold
Solder tails area: 100m² Tin/Lead

ELECTRICAL

Operation voltage: 250 VAC max.
Current rating: 3 Amps max.
Contact resistance: 20 mohms max.
Insulation resistance: 3000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC / minute
Operating temperature: -55°C TO +105°C

RoHS Compliant

All Connectors


www.allconnectors.de
Tel.: 0049 711 7009508
70794 Filderstadt Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kottbomsstr. 25

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	X ± 0.50
DATE		.X ± 0.30
SIZE A4	P PROJECTION	.XX ± 0.20
		.XXX \pm
		ANG \pm



ORDER INFORMATION

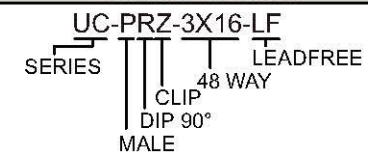

DESCRIPTION: