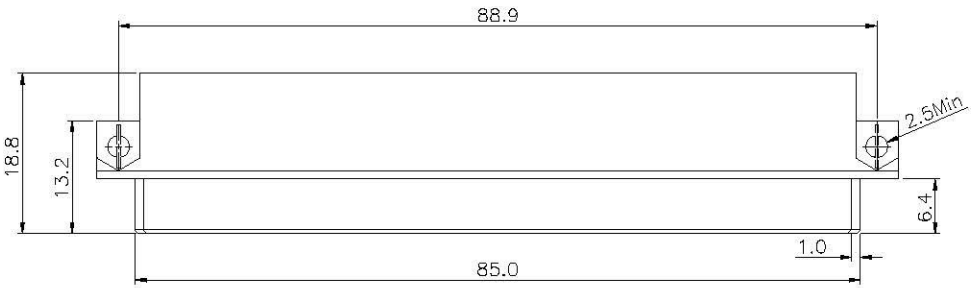

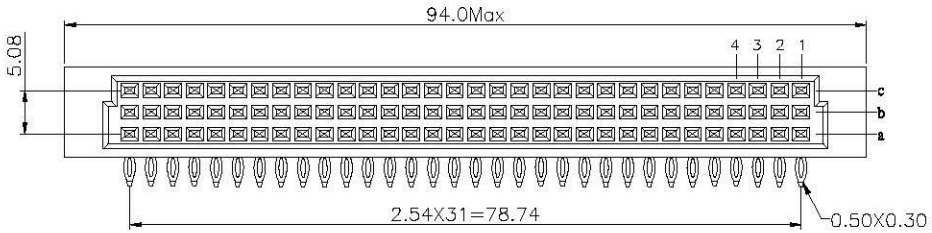





Press Fit Type

Material:
Housing: 30% Glass filled PBT UL94V-0.
Contacts: Phosphor Bronze.
Lock: Phosphor Bronze.

Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C .

***RoHS Compliant**

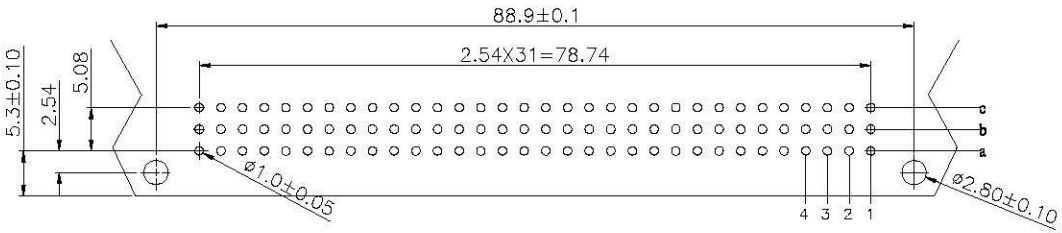

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	96	a b c	
	64	a - c	
	32	a - -	
5.08mm	48	a b c	
	32	a - c	
	16	a - -	

UC-SQ-3X32-LF
LEADFREE
RoHS Compliant

All Connectors
www.allconnectors.de
Tel.: 0049 711 7099503
70791 Filderstadt - Germany
info@allconnectors.de
Fax: 0049 711 7099504
Kettemerstr. 25

PART NO. UC-SQ-3X32							
DWG NO. UC-SQ-3X32	CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:				
FILE NO.	DRAWING BY						
UNIT / mm	SCALE 1 : 1	PROJECTION	AREA	REVISIONS	HK	DATE	