

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

△ SPECIFICATION

MATERIAL

Insulator: PBT & glass fill reinforced , rated UL94V-0
Contacts: Brass(Male), Phosphor Bronze(Female)
Rivet,Boardlock: Copper alloy

CONTACT PLATING

Contact area: Gold flash
Solder tails: 100u" Tin over 40u" Nickel

ELECTRICAL

Operation voltage: 250 VAC max.
Current rating: 3 Amps max.
Contact resistance: 20 mohms max.
Insulation resistance: 3000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC / minute
Operating temperature: -55°C TO +105°C

RoHS Compliant

All Connectors

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettnerstr. 25

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1 : 1


DATE

SIZE A4


TOLERANCES ARE

X ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

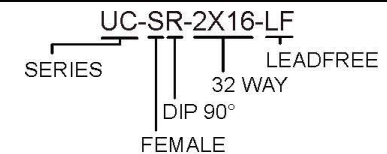

DESCRIPTION: DIN 41612 (THREE ROW) FEMALE RIGHT ANGLE 32P