

SPECIFICATION

MATERIAL

Insulator: PBT & glass fill reinforced , rated UL94V-0

Contacts: Brass(Male), Phosphor Bronze(Female)

Rivet,Boardlock: Copper alloy

CONTACT PLATING

Underplate: 50u" Nickel

Contact area: 1u"~30u" Selective Gold

Solder tails area: 100u" Tin/Lead

ELECTRICAL

Operation voltage: 250 VAC max.

Current rating: 3 Amps max.

Contact resistance: 20 mohms max.

Insulation resistance: 3000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55°C TO +105°C

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: ± 0.10 mm

Allconnectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettenerstr. 25

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT/mm SCALE 1:1
DATE
SIZE A4


TOLERANCES ARE

X ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

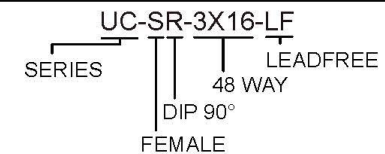

DESCRIPTION: DIN 41612(THREE ROW) FEMALE (R TYPE)