

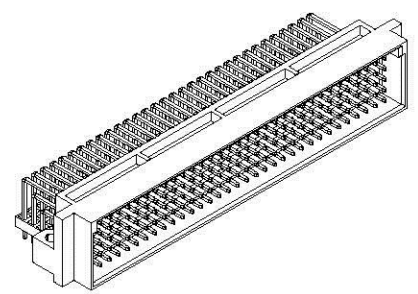
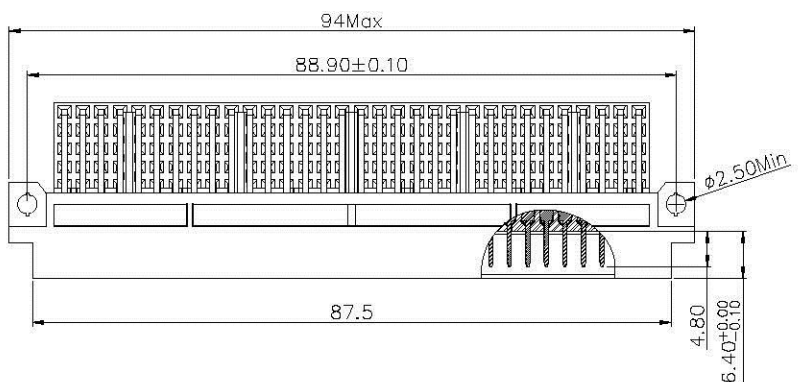
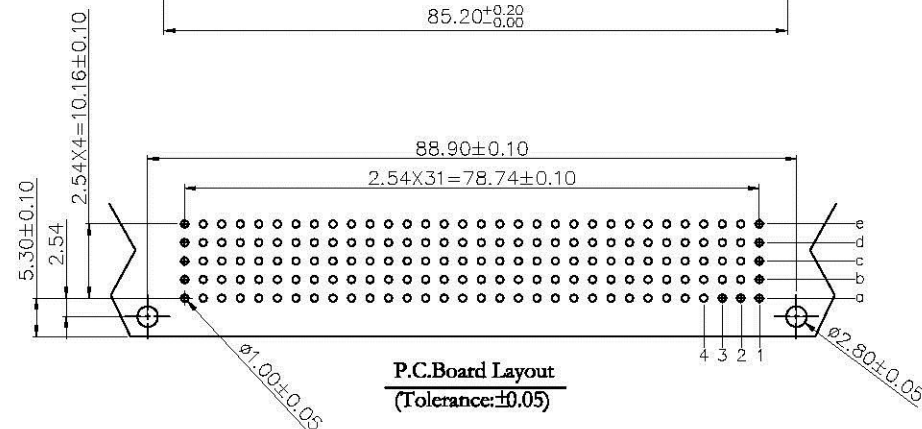


1 2 3 4 5 6 7 8 9 0

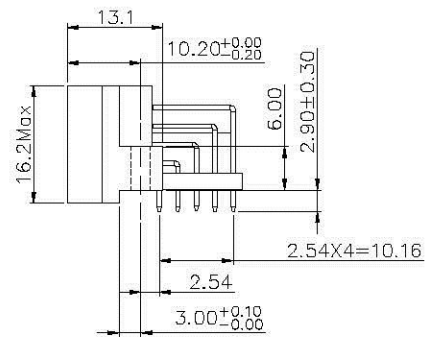

Material:
 Housing: 30% Glass Filled PBT UL94V-0.
 Contacts: Brass.
Electrical Characteristics:
 Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~+105°C .
***RoHS Compliant**

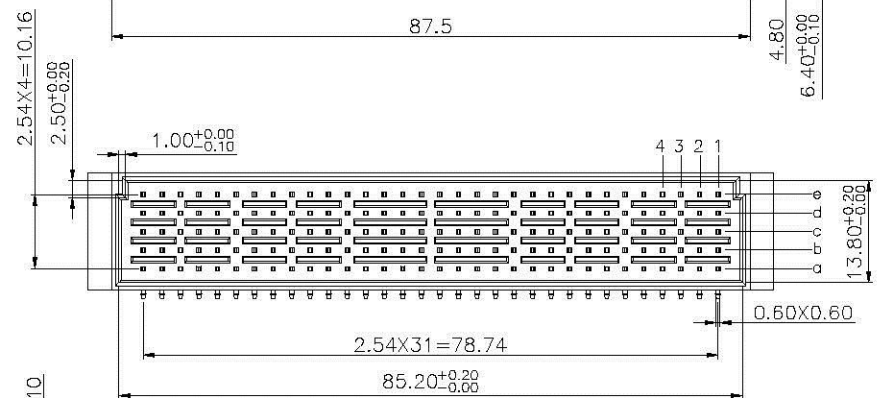

UE-PR-5X32-LF
 LEADFREE
 RoHS Compliant

All connectors

www.allconnectors.de
 Tel.: 0049 711 7009503
 70294 Filzbergstr. Germany

info@allconnectors.de
 Fax: 0049 711 7009504
 Kottmerstr. 25

PART NO. UE-PR-5X32		CHECKED BY CY		TOLERANCES ARE X ± 0.5 .X ± 0.25 .XX ± 0.15 .XXX ± ANG	DESCRIPTION:		
DWG NO. UE-PR-5X32		DRAWING BY					
FILE NO.		PROJECTION		AREA	REVISIONS	DATE	
UNIT / mm	SCALE 1:1						