




Material:

Housing: 30% Glass filled PBT UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 5.6AMP.
Dielectric Withstanding Voltage: AC1000V For 1 minute.
Insulator Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 30m Ω max. at DC 100mA.
Operating Temperature: -55°C ~+105°C .

***RoHS Compliant**

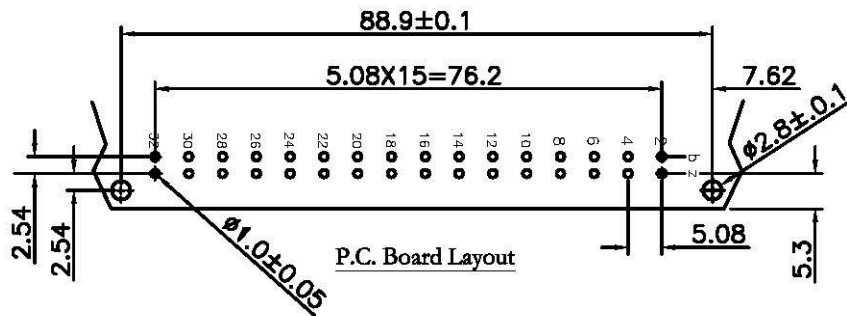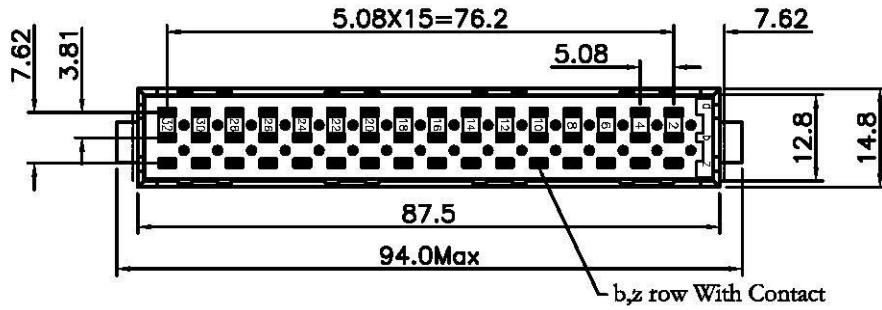


RoHS Compliant

All Connectors


www.allconnectors.de
Tel.: 049 711 709503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 049 711 709504
Kettnerstr. 25

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	X ±
DATE		.X ±
SIZE A4	PJECTION	.XX ±
		.XXX ±
		ANG ±



ORDER INFORMATION

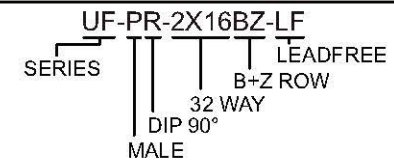

DESCRIPTION: