

**Material:**

Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
 Contacts: Copper Alloy.

**Electrical Characteristics:**

Current Rating: 5.6 AMP.  
 Dielectric Withstanding Voltage: AC 1550V For 1 minute.  
 Insulator Resistance: 1000MΩ min. at DC 500V.  
 Contact Resistance: 15mΩ max. at DC 100mA.  
 Operating Temperature: -55°C~+125°C .

**\*RoHS Compliant**


**RoHS Compliant**

**All Connectors**


www.allconnectors.de  
 Tel.: 0049 711 7009708  
 70794 Filderstadt - Germany

info@allconnectors.de  
 Fax: 0049 711 7009704  
 Kettenwegstr. 25

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	X ± 0.50
DATE		X ± 0.25
SIZE A4	PJECTION	.XX ± 0.15
		.XXX ±
		ANG ±



**ORDER INFORMATION**

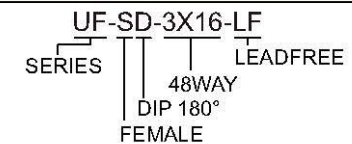

DESCRIPTION: