



Material:


Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 5.6 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~ +105°C .

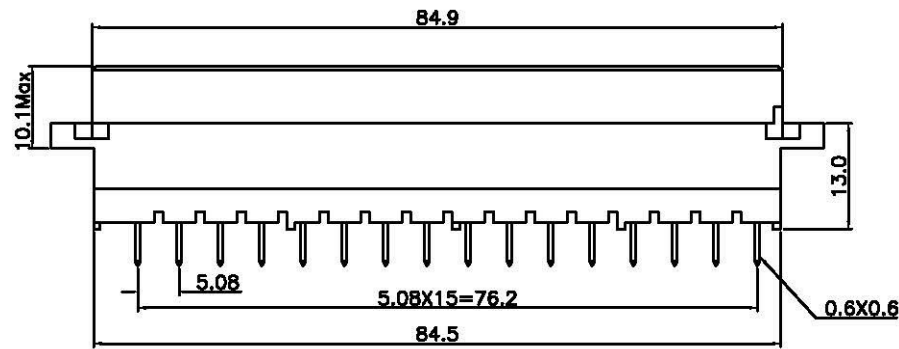

(A3) *RoHS Compliant

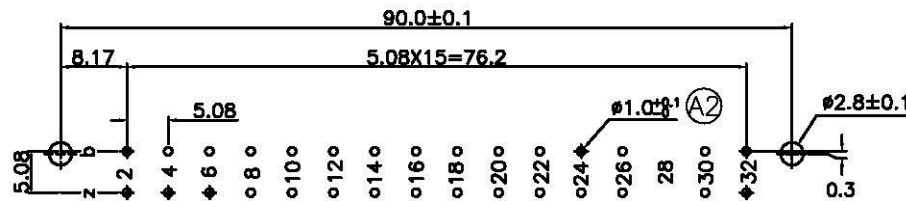

P.C. Board Layout

RoHS Compliant


All Connectors

www.allconnectors.de info@allconnectors.de
 Tel. 0049 711 7009503 Fax: 0049 711 7009504
 70734 Filzsteden - Germany Kettenstr. 25


DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PJECTION

TOLERANCES ARE

X ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

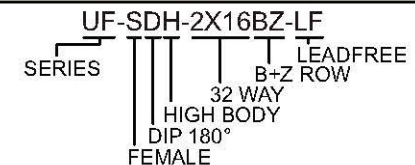

DESCRIPTION: