



P.C. Board Layout
(Tolerance:±0.05)

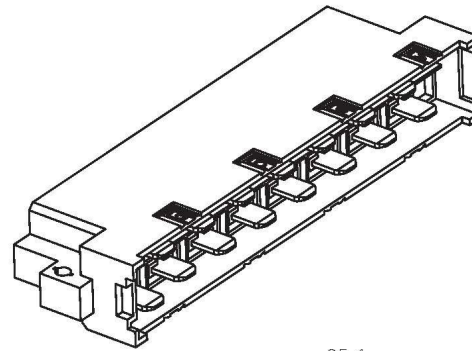

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 15 AMP.
Dielectric Withstanding Voltage: AC 3100V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 8mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

Note: d26 Contact Length 7.65mm,
Other Pin Contact Length 6.00mm.
Dip Length 2.9mm.

CONTACT NO.	L
z4,z8,z12,z16,z20,z24,z28,z32	6.00
d6,d10,d14,d18,d22,d30	6.00
d26	7.65

All Connectors

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettenerstr. 25


RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT/ mm SCALE 1:1
DATE
SIZE A4


TOLERANCES ARE

X ± 0.50
X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

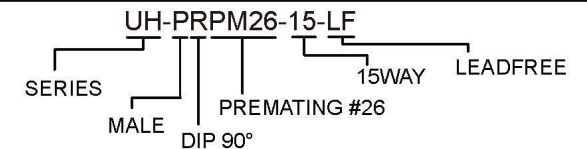

DESCRIPTION: