

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Coaxial or Power: Cu Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C .

*** RoHS Compliant**

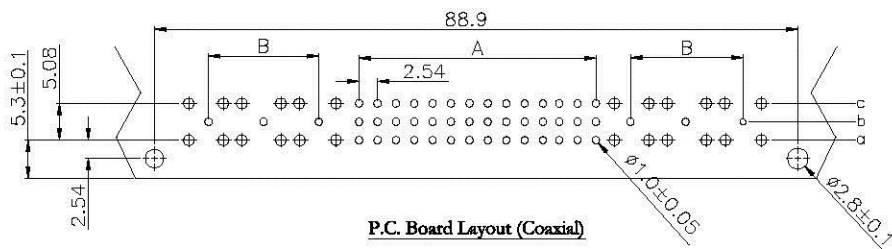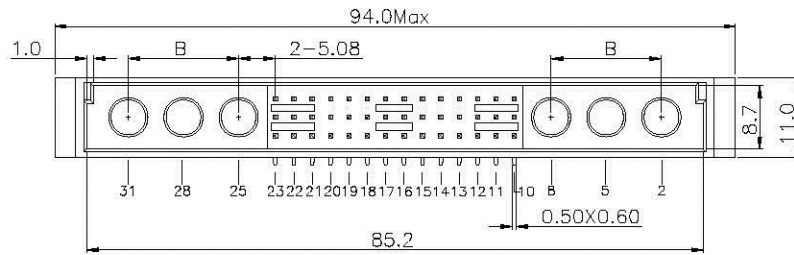

P.C. Board Layout (Coaxial)

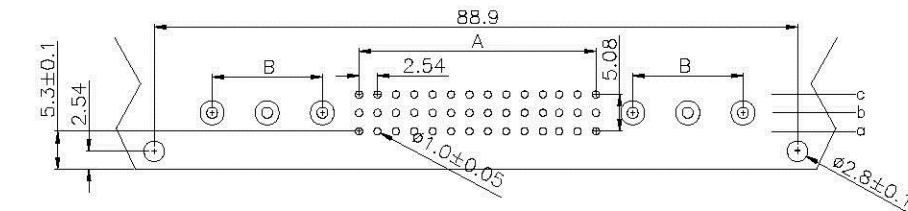

P.C. Board Layout (Power)

UM-PR-xx+x-LF
LEADFREE

- 78+2
- 60+4
- 42+6
- 24+8
- 6+10
- 52+2
- 40+4
- 28+6
- 16+8
- 4+10

RoHS Compliant

Dimension				
A	(2.54 x No of Contact)/3-2.54			
B	(7.62 x No of Coaxial)/2-7.62			
Pitch	Position	Rows with Contacts	Contact Arrange	With Coaxial Or Power
2.54mm	78	a b c		2 Pcs
	60	a b c		4 Pcs
	42	a b c		6 Pcs
	24	a b c		8 Pcs
	6	a b c		10 Pcs
	52	a - c		2 Pcs
	40	a - c		4 Pcs
	28	a - c		6 Pcs
	16	a - c		8 Pcs
	4	a - c		10 Pcs

Allconnectors

www.allconnectors.de
Tel.: 0219 711 7009501
70794 Filzschleif - Germany

info@allconnectors.de
Fax: 0219 711 7009501
Kettnerstr. 25

PART NO. UM-PR-xx+x

DWG NO. UM-PR-xx+x

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

- .X ± 0.2
- .XX ±
- .XXX ±
- AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE