


9001 Series

DIN41612 F Type Male

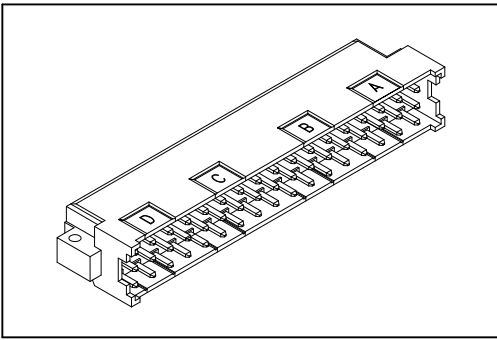

Material:


Housing: 30% Glass Filled PBT UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 15mΩ max.
Operating Temperature: -55°C ~ +125°C.

Features:

- * UL, cUL listing.
- * Mates with Female 3Row
9001-62481C, 9001-64481C

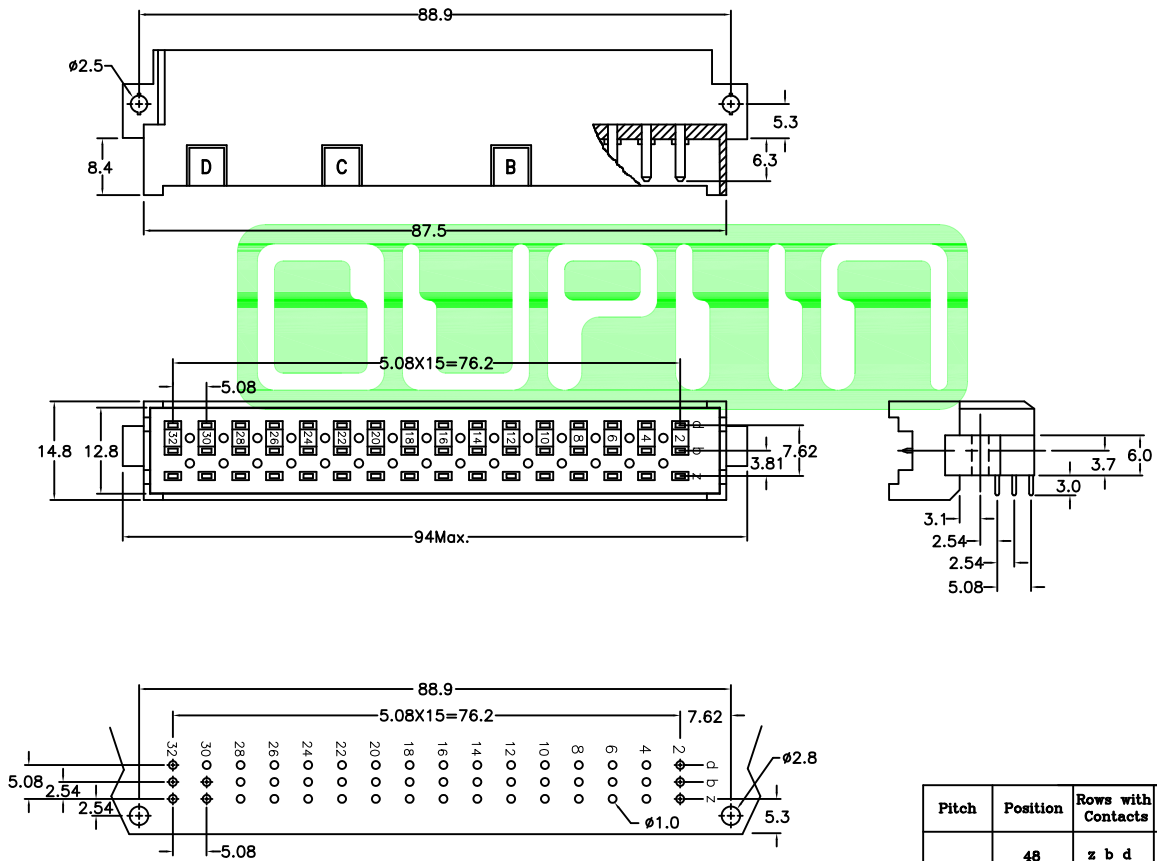

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange
5.08mm	48	z b d	<pre> +++++d +++++b +++++z 8 9 4 2 </pre>
	32	z - d	<pre> +++++d +++++b +++++z 8 9 4 2 </pre>
	16	z - -	<pre> +++++d +++++b +++++z 8 9 4 2 </pre>

Ordering information

9001- 61 48 1 C 00 A
 Series 1: Male Position 1: Dip Length
 C: Dip Tin Contact Gold G: Gold
 00: G/F 10: 10μ" 30: 30μ"
 A: Tray Package

*Standard Gold Flash.