
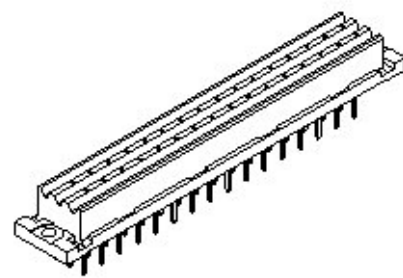


REV.	SPECIFICATION	ECN NO.	APPD.
A5		12/12/06	

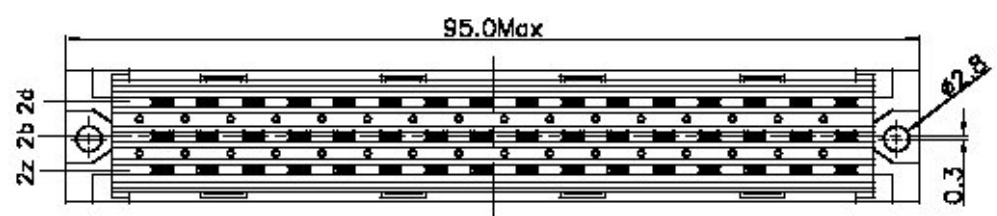

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 5.6 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

***RoHS Compliant**

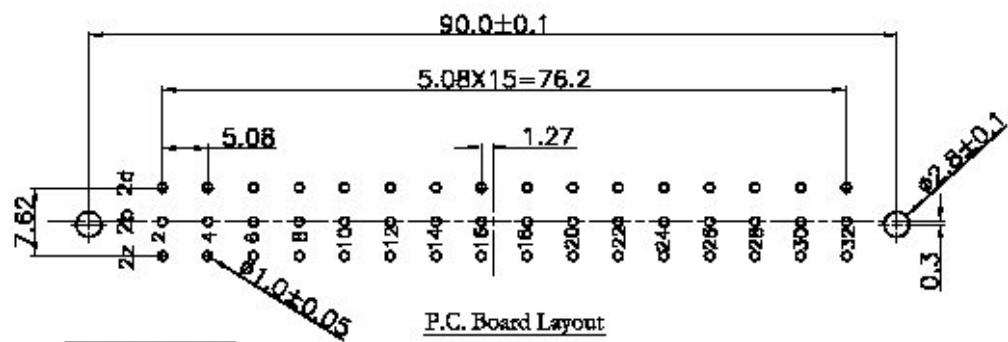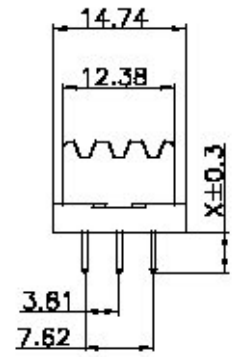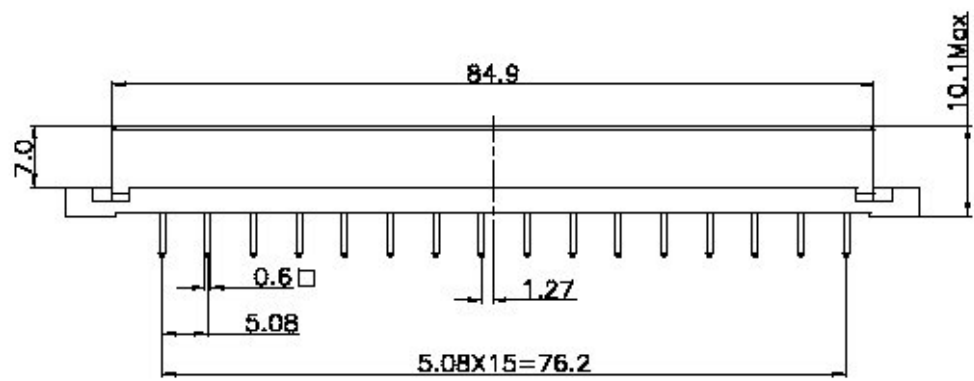

P.C. Board Layout

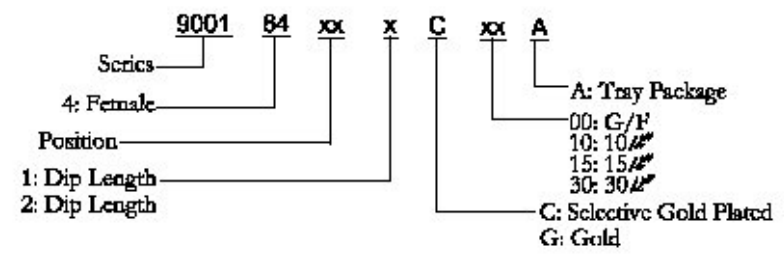

Pitch	Position	Rows with Contacts	Contact Arrange	x length	
				1	2
5.08mm	48	z b d		3.7	4.5
	32	x - d			
	16	z - -			

Tolerances	Drawn No.	9001D64001	Title:
x = ±0.5	Projection		9001 Series
x = ±0.25	Unit	mm	DIN41612
.xx = ±0.15	Scale	1:1	F Type Female Low Profile
	Drawn By	Lixiaojun	

SHEET	1/1	Ver. No.	A5
-------	-----	----------	----

Allconnectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel: +49 (0)711 / 358 110 20 | Fax: +49 (0)711 / 358 110 25

P/N: 9001-64xxxCxxA