9001 Series

DIN41612 Mixed Style H7/F24 Male

All Connectors
www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

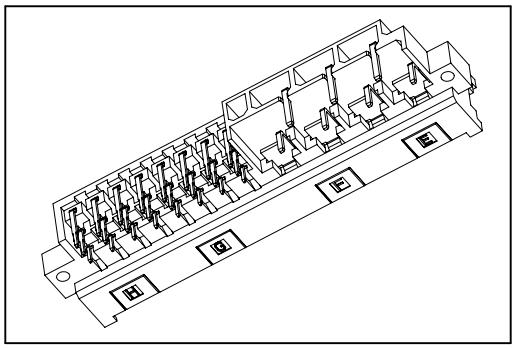

Material:

Housing: 30% Glass filled PBT UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 5.6 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+105°C .

Features:

* Power connectors.
* Mates with 9001-66311C.

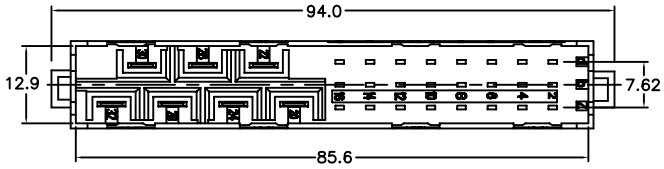



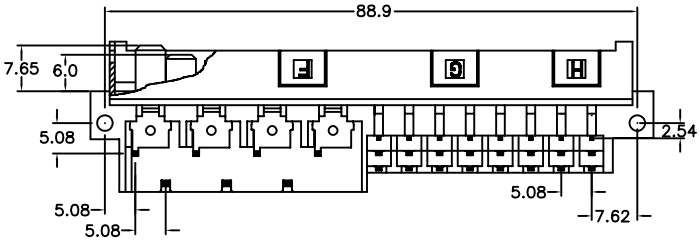

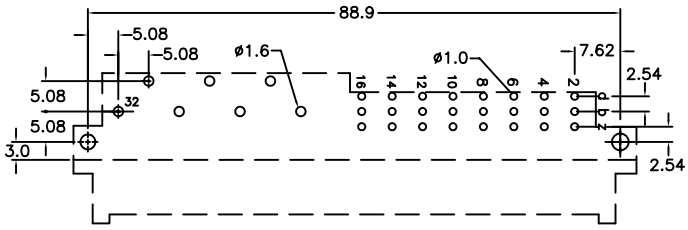

P.C. Board Layout

Ordering information

9001-	65	31	1	C	00	A
Series	5: Male	Position	1: z32 Premating 1.65mm	C: z20~z32 TIN/NI Plating Other With Selective Gold Plated A: z20~z32 AG/NI Plating Other With Selective Gold Plated	00: G/F 10: 10 μ″ 15: 15 μ″ 30: 30 μ″	A: Tray Package