
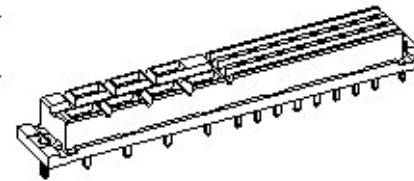


REV.	SPECIFICATION	ECN NO.	APPD.
A3		12/12'06	

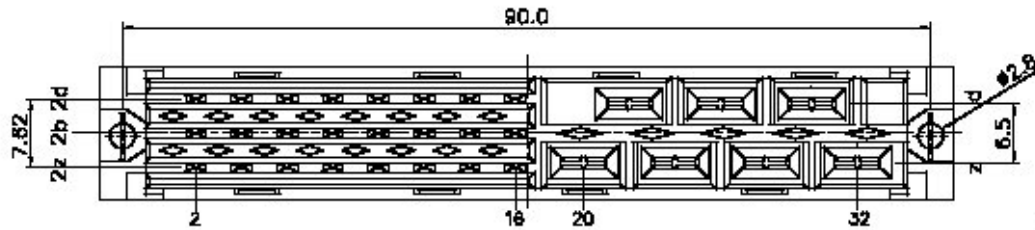

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Lock: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 5.6 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

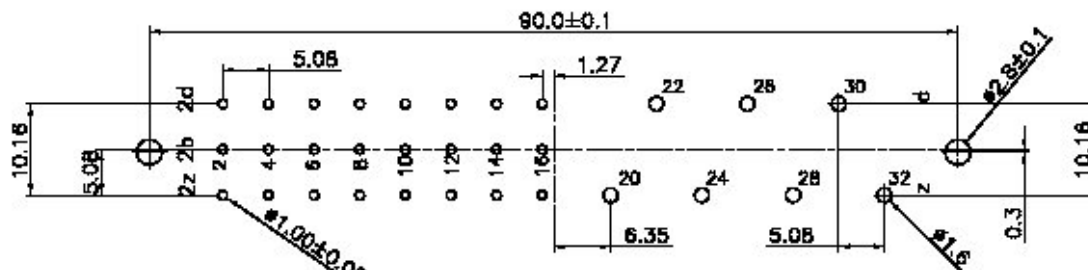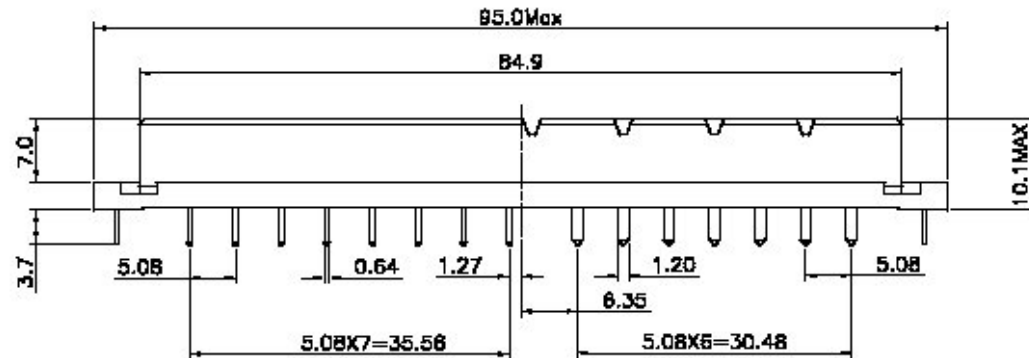

PC Board Layout

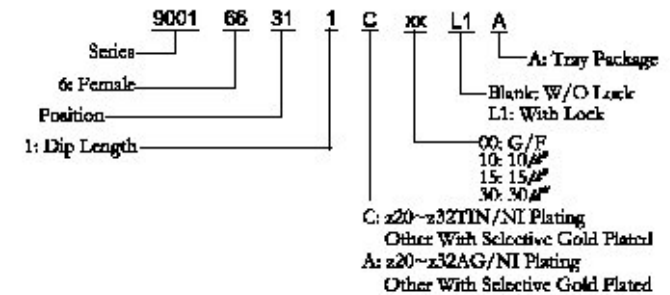

Tolerances	Drawn No.	9001D86002
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Lixiaojun

Title:
9001 Series
DIN41612
Mixed Style H7/F24 Female

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel: +49 (0)711 / 358 110 20 | Fax: +49 (0)711 / 358 110 25

P/N: 9001-66311CxxL1A

SHEET	1/1	Ver.No.	A3
-------	-----	---------	----