

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 0.3 AMP.






Dielectric Withstanding Voltage: AC 100V For 1 minute

Insulator Resistance: 100MΩ min. at DC100V.

Contact Resistance: 90mΩ max. at AC 1mA.

Operating Temperature: -25°C ~+85°C .

***RoHS Compliant**

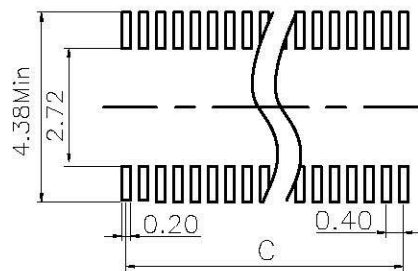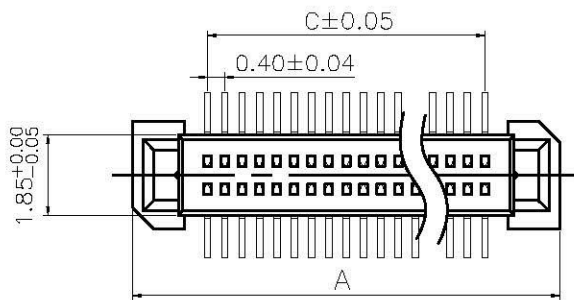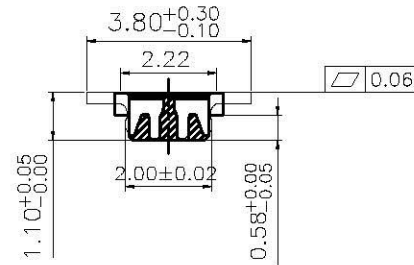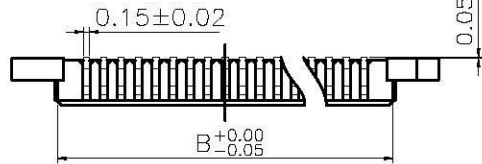

NP04-P03X-xxx-LF
 POSITION LEADFREE
 RoHS Compliant

RECOMMENDED P.C.B. LAYOUT
 TOLERANCE ±0.05
 TOP VIEW

Position Dimension	10 Thru 100
A	0.40 X No. of Positions / 1.5+2.4
B	0.40 X No. of Positions / +1.75
C	0.40 X No. of Positions /

100	23.10	20.95	19.60
90	21.10	18.95	17.60
80	19.10	16.95	15.60
72	17.50	15.35	14.00
70	17.10	14.95	13.60
60	15.10	12.95	11.60
50	13.10	10.95	9.60
40	11.10	8.95	7.60
34	9.90	7.75	6.40
30	9.10	6.95	5.60
26	8.30	6.15	4.80
24	7.90	5.75	4.40
22	7.50	5.35	4.00
20	7.10	4.95	3.60
16	6.30	4.15	2.80
14	5.90	3.75	2.40
12	5.50	3.35	2.00
10	5.10	2.95	1.60
Number of Position	A	B	C

Allconnectors

www.allconnectors.de
 Tel.: 0049 711 7005008
 70734 Filzschlößel Germany

info@allconnectors.de
 Fax: 0049 711 7005001
 Kollernstraße 25

PART NO. NP04-P03X-xxx

DWG NO. NP04-P03X-xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE