
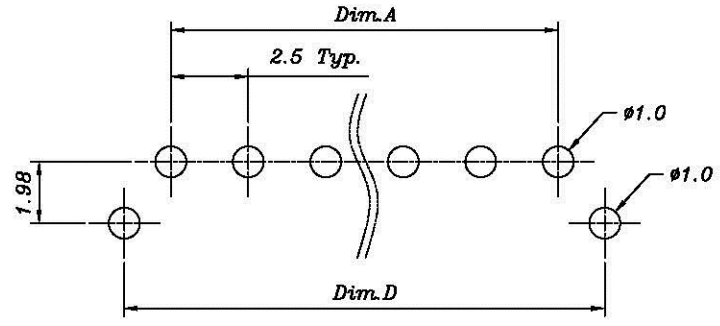


REV	MODIFICATION	DATE	DRAW	APPROVE
A	New Release	11/07/2002	Ben	Ivan
B	EC0603004	03/09/2005	Tom	Giordano
C	EC0504030	04/22/2005	Tom	Giordano

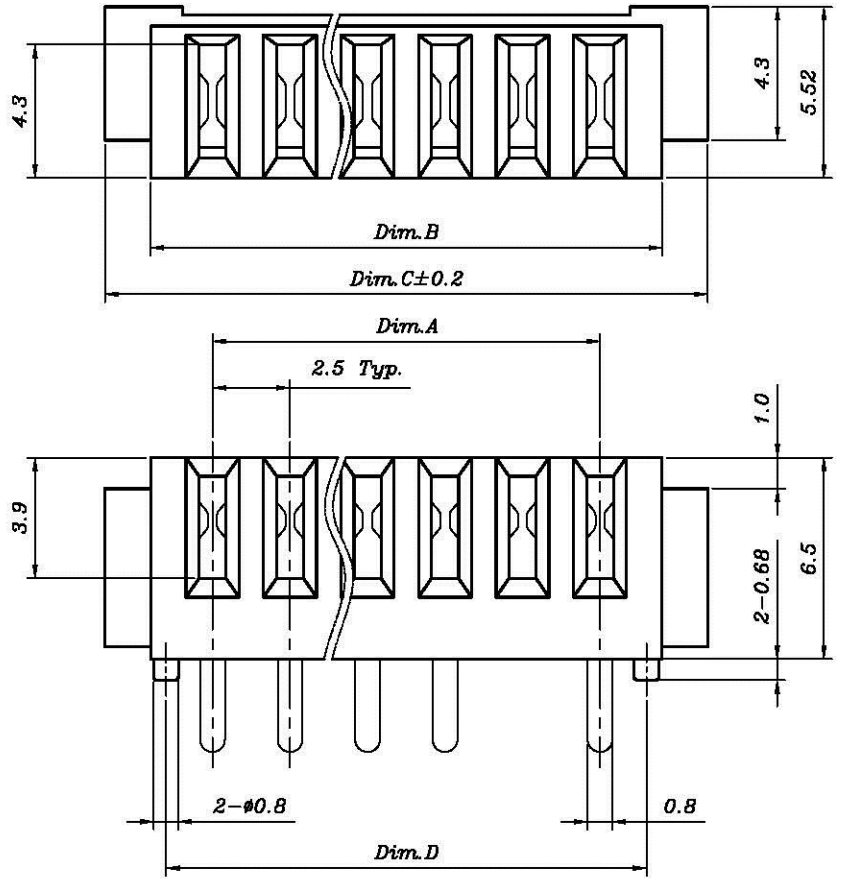

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

Notes :

- Material :**
Housing : Thermoplastic , UL 94V-0
Terminal : Copper Alloy
- Finish :**
Terminal : Selected Gold on Contact Area, Gold Flash on Solder Tails, Both Over 50u" Min. Ni Under-plated Overall
- Order Information :**

X SBO-010 X S-00T X

T : Lead Free
N/A : Normal

Amount of Pins

- S : 3 Pins
- X : 5 Pins
- A : 10 Pins

Plating

- S : 2u" Min. Gold on Contact Area
- X : 5u" Min. Gold on Contact Area
- A : 15u" Min. Gold on Contact Area
- B : 30u" Min. Gold on Contact Area

Part No.	Dim.	Dim.A	Dim.B	Dim.C	Dim.D
XSB0-01033-00TX		5.0	9.0	11.95	8.0
XSB0-01043-00TX		7.5	11.5	14.45	10.5
XSB0-01053-00TX		10.0	14.0	16.95	13.0
XSB0-01063-00TX		12.5	16.5	19.45	15.5
XSB0-01073-00TX		15.0	19.0	21.95	18.0
XSB0-01083-00TX		17.5	21.5	24.45	20.5
XSB0-01093-00TX		20.0	24.0	26.95	23.0
XSB0-010A3-00TX		22.5	26.5	29.45	25.5

DIMENSION IN mm [inch]			Title 2.5mm Pitch Battery Conn. Female Type		
Tolerance unless otherwise specified					
X. ± 0.38	X.' ± 10'	CUSTOMER DRAWING	Dwg No. OSBO-01003-00T0	Scale: 4 : 1	
X.X ± 0.20	X.X' ± 5'		File No. N/A	Size: A4	
X.XX ± 0.13	X.XX' ± 2'		Approve:	Draw: Tom	Rev : C
X.XXX ±			Check:	04/22/2005	Sheet: 1/1