

REV.	DESCRIPTION	ECN NO.	DATE	DRAWER
A	New Release		12/20/2006	Alan
B	Modified by Customer Design	EC0706018	06/12/2007	Kelly

Notes:

- Material :
Housing : Thermoplastic UL 94V-0 , Black
Terminal : Copper Alloy
- Finish :
Terminal : Selected Gold on Contact Area,
G/F on Solder Tails, Both over
50u" Min. Ni Under-plated Overall
- Order Information :


SB1-042 X 3-11T X
T : RoHS(for High Temperature)

Amount of Pins:


- 3 : 3 Pins
- 5
- 9 : 9 Pins
- A : 10 Pins

Plating Option:

- 2 : 2u" Min. Gold on Contact Area
- 3 : 5u" Min. Gold on Contact Area
- 4 : 10u" Min. Gold on Contact Area

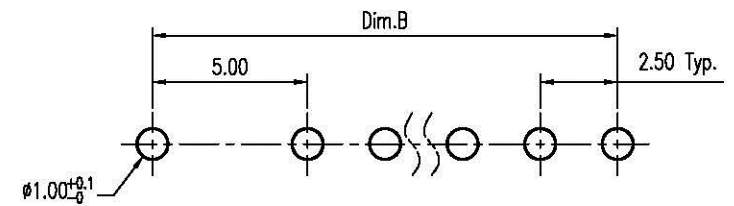

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

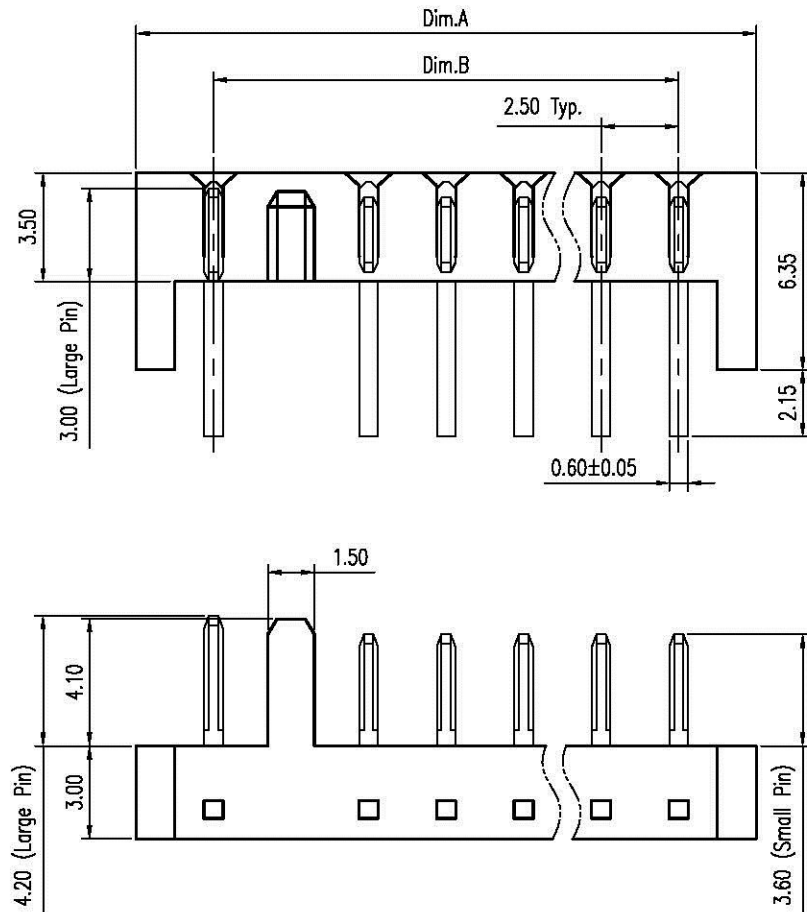

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B
TSB1-04233-11TX	3	3	12.50	7.50
TSB1-04243-11TX	4	4	15.00	10.00
TSB1-04253-11TX	5	5	17.50	12.50
TSB1-04263-11TX	6	6	20.00	15.00
TSB1-04273-11TX	7	7	22.50	17.50
TSB1-04283-11TX	8	8	25.00	20.00
TSB1-04293-11TX	9	9	27.50	22.50
TSB1-042A3-11TX	10	10	30.00	25.00

DIMENSION IN mm [inch]	
Tolerance unless otherwise specified	
X.	X.' ± 10'
X.X ± 0.38	X.X' ± 5'
X.XX ± 0.25	X.XX' ± 2'
X.XXX ± 0.13	X.XXX' ±

All Connectors
www.allconnectors.de
info@allconnectors.de
+49 40 27 123 000 2004
+49 40 27 123 000 2004
Kettendammstr. 22

CUSTOMER DRAWING
Approver:
Checker:

Title: 2.5mm Pitch Battery Conn. Male Type
Dwg No. TSB1-042X3-11TX
File No. PO3014
Drawer: Kelly
06/12/2007

Scale: 4 : 1
Size: A 4
Rev : B
Sheet: 1 / 1