
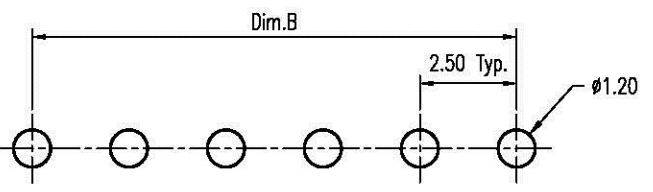
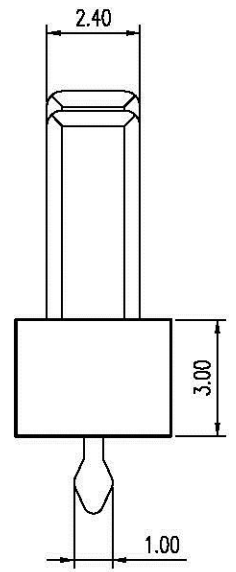
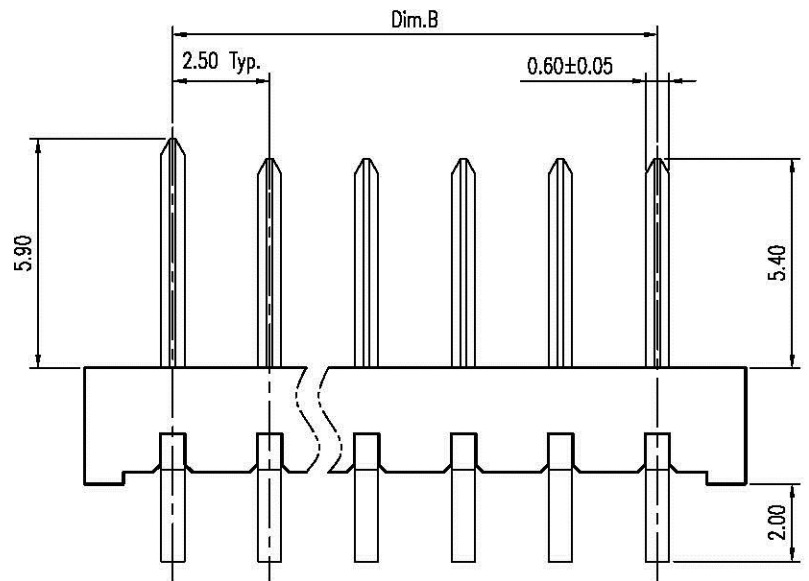


REV.	DESCRIPTION	ECN NO.	DATE	DRAWER
A	New Release		08/20/2008	Steven

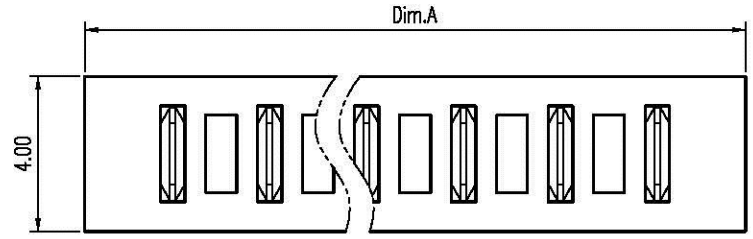

**Notes:**

- Material :**  
Housing : Thermoplastic UL 94V-0 ,Black  
Terminal : Copper Alloy
- Finish :**  
Terminal : Selected Gold on Contact Area,  
G/F on Solder Tails, Both over  
50u" Min. Ni Under-plated Overall
- Order Information :**  
SB1-052 X 0-OHT X  
T: RoHS(for High Temperature)

**Amount of Pins:**  
4: 4Pins  
2: 2

**A: 10Pins**  
**B: 11Pins**

**Plating Option:**  
2: 2u" Min. Gold on Contact Area  
3: 5u" Min. Gold on Contact Area

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B
TSB1-05240-OHTX	4		12.05	7.50
TSB1-05250-OHTX	5		14.55	10.00
TSB1-05260-OHTX	6		17.05	12.50
TSB1-05270-OHTX	7		19.55	15.00
TSB1-05280-OHTX	8		22.05	17.50
TSB1-05290-OHTX	9		24.55	20.00
TSB1-052A0-OHTX	10		27.05	22.50
TSB1-052B0-OHTX	11		29.55	25.00

DIMENSION IN mm [inch]		<b>All Connectors</b>	Title 2.5mm Pitch Battery Conn. Male Type
Tolerance unless otherwise specified			
X.	X.' ± 10'	www.allconnectors.de	Dwg No. TSB1-052X0-OHTX
X.X ± 0.38	X.X' ± 5'	in FeB's allconnectors.de	File No. PO3015
X.XX ± 0.25	X.XX' ± 2'	Tel.: 0049 7141 7098908	Scale: 5 : 1
X.XXX ± 0.13	X.XXX' ±	70744 Bilsenstadt - Germany	Size: A 4
Apprøver:		CUSTOMER DRAWING	
Checker:		Rev : A	
		Drawer: Steven	
		08/20/2008	
		Sheet: 1 / 1	

