
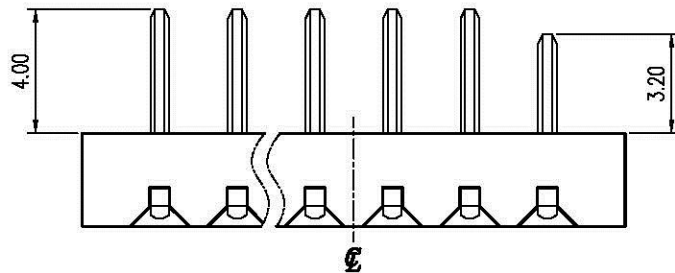


REV.	DESCRIPTION	ECN NO.	DATE	DRAWER
A	New Release		09/24/2008	Steven

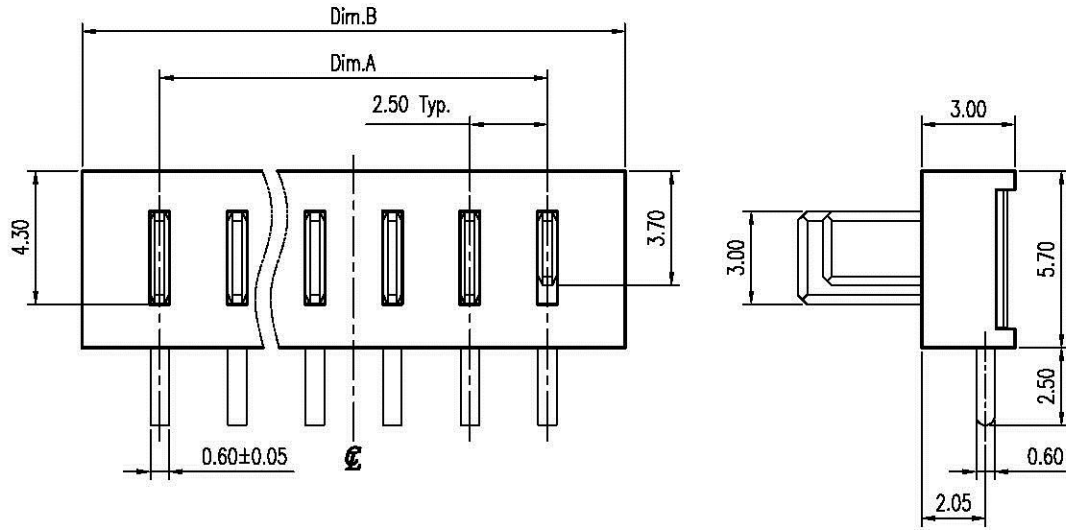


Notes:

- Material :
Housing : Thermoplastic UL 94V-0 , Black
Terminal : Copper Alloy
 - Finish :
Terminal : Selected Gold on Contact Area, Gold Flash on Solder Tails, Both over 50u" Min. Ni Under-plated Overall
 - Order Information :
SB1-080 X 3-0BT X
T : RoHS(for High Temperature)
- Amount of Pins :
4 : 4 Pins
9 : 9 Pins
A : 10 Pins
- Plating Option :
2 : 2u" Min. Gold on Contact Area
3 : 5u" Min. Gold on Contact Area

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B
TSB1-08043-0BTX	4		7.50	12.50
TSB1-08053-0BTX	5		10.00	15.00
TSB1-08063-0BTX	6		12.50	17.50
TSB1-08073-0BTX	7		15.00	20.00
TSB1-08083-0BTX	8		17.50	22.50
TSB1-08093-0BTX	9		20.00	25.00
TSB1-080A3-0BTX	10		22.50	27.50

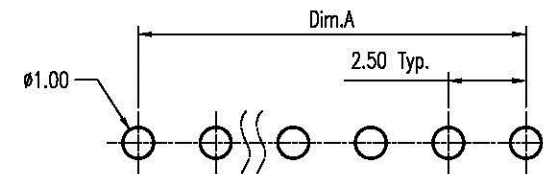

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

DIMENSION IN mm [inch]			Title 2.5mm Pitch Battery Conn. Male Type		
Tolerance unless otherwise specified			Dwg No. TSB1-080X3-0BTX		
X.X ± 0.38	X.X' ± 10'	www.allconnectors.de	File No. N/A		Scale: 4 : 1
X.X ± 0.38	X.X' ± 5'	info@allconnectors.de	Rev : A		Size: A 4
X.XX ± 0.25	X.XX' ± 2'	70754 Eßleben, (a.B.) Germany	Appraver:		Rev : A
X.XXX ± 0.13	X.XXX' ±		Checker:		Sheet: 1 / 1
			Drawer: Steven		09/24/2008