This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
AX1	PRELIMINARY RELEASE	Fido Weng		
B				
C				

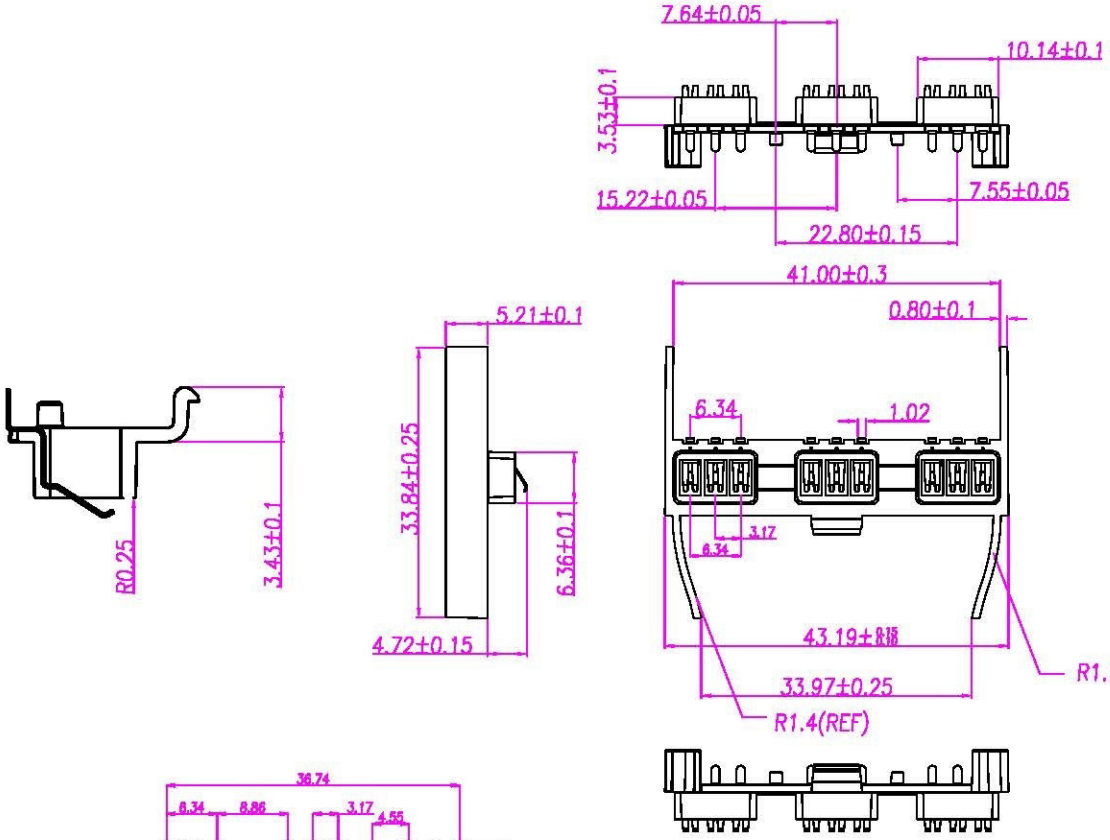

RECOMMEND P.C.B LAYOUT

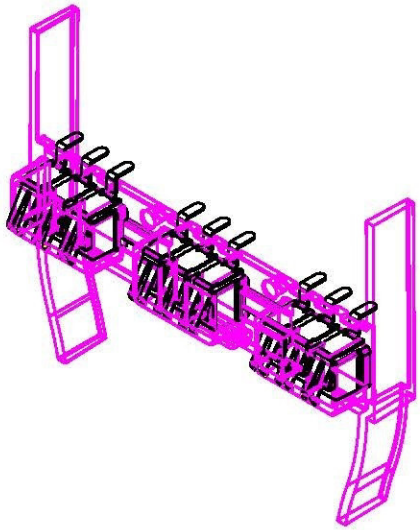

1. Material & Finish:
   1-1.Insulator : LCP, UL94V-0, Black
   1-2. Contact : Brushh BERYLLIUM COPPER ALLOY 290TM04 T=0.2mm Contact finishGold 30u" min. on contact area, Tin 120u" min. on solder area, both over Nickel 50u" min.
   1-3. Rubber : EPDM 70% ; COLOR:BLACK
2. RATINGS
   2-1.Rated Voltage: 100V AC (per contact)
   2-2.Rated Current: 1A AC/DC (per contact)
   2-3. Operating Temperature Range: -40℃ ~ +100℃
   2-4. Storage Temperature Range: -20℃ ~ +70℃
   2-5. Humidity Range: 10% to 80% RH

DRAWN	賴錦志	APP'D		UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	All Connectors	TITLE	9PIN BATTERY SIDE SWIPE	SHEET
CHK'D				SCALE	1:1		www.allconnectors.de Tel.: 0049 711 7006303 70794 Filderstadt - Germany Info@allconnectors.de Fax: 0049 711 7006304 Reitlenerstr. 25	PART NO.	HO-09F3-01	DWG NO. QC4241 / VERSION AX1