


Notes: 1. 材質:  
 膠芯: Nylon 9T + 30% G.F., UL 94V-0, 黑色  
 端子: C2680-H, 鍍厚=0.06 ± 0.02mm  
 2. 電鍍:  
 端子: 對接區: 選鍍金  
 焊錫區: 1u" Min.金  
 鍍底: 50u" Min.

項次	名稱	零件料號	數量
1	膠芯	T1-SB1040-X1000	1
2	端子	T5-SB1040-Q300X	Amount of Pins

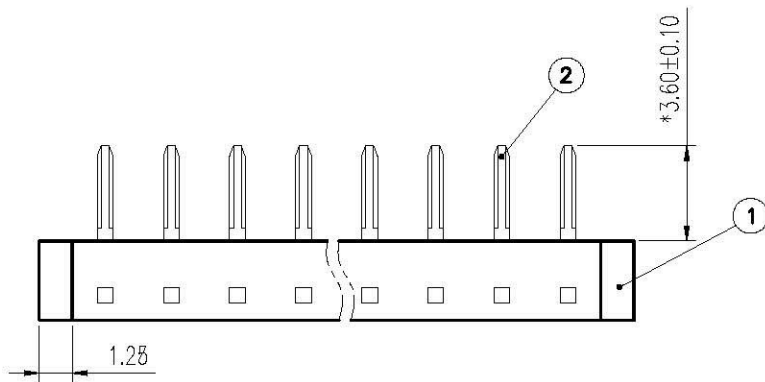

Dimension Information:

Part No.	Dim.	Dim.A	Dim.B
BCC25-PR40-03	10.00	5.00	
BCC25-PR40-04	12.50	7.50	
BCC25-PR40-05	15.00	10.00	
BCC25-PR40-06	17.50	12.50	
BCC25-PR40-07	20.00	15.00	
BCC25-PR40-08	22.50	17.50	
BCC25-PR40-09	25.00	20.00	
BCC25-PR40-10	27.50	22.50	

BCC25-PR40-xx-LF  
 LEADFREE

RoHS Compliant

**Allconnectors**

www.allconnectors.de  
 info@allconnectors.de  
 Tel.: 0049 711 7009502  
 70734 Filderstadt - Germany  
 Fax: 0049 711 7009504  
 Kellernstr. 25

PART NO. BCC25-PR40-xx

DWG NO. BCC25-PR40-xx

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

2.5mm Pitch Battery Conn.  
 Male Type

FILE NO.

DRAWING BY

.X ± 0.2  
 .XX ± 0.1

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION



.XXX ±  
 AWG