
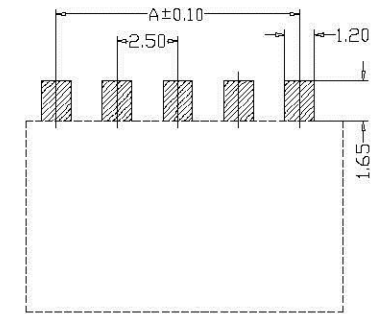


Specifications:

Current Rating:1.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:30m ohm Max
 Withstanding Resistance:1000M ohm
 Withstanding Voltage:500V AC/Minute
 Temperature Range : $-25^{\circ} \sim +125^{\circ}$
 Material:

Contact Material:Copper Alloy
 Plastic Material:High Temp Plastic UL94V-0
 Plastic Color:Black
 Finish:Gold Plated

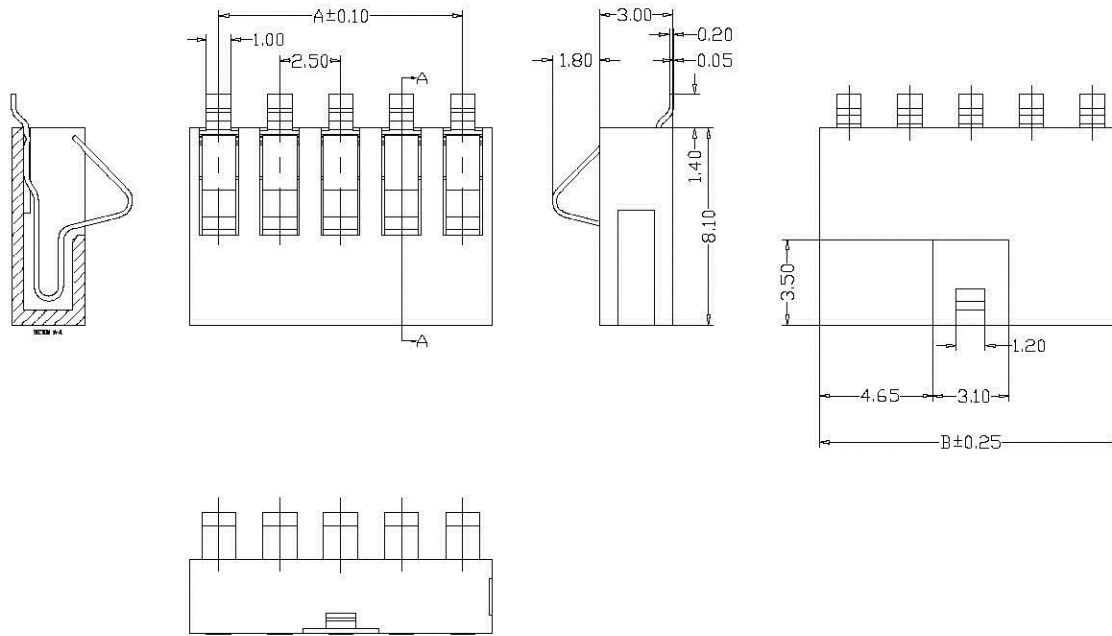

PCB LAYOUT

BCS25-V30X-xx-LF
 LEADFREE

RoHS Compliant

Pin No.	A	B
BCS25-V30X-02	2.50	4.90
BCS25-V30X-03	5.00	7.40
BCS25-V30X-04	7.50	9.90
BCS25-V30X-05	10.00	12.40

All Connectors

www.allconnectors.de
 Tel.: 0049 711 7009508
 70794 Hilderstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7009504
 Kettnerstr. 25

PART NO. BCS25-V30X-xx

DWG NO. BCS25-V30X-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE