


- Notes:**
- Material :
 - Housing : Thermoplastic UL 94V-0, Black
 - Terminal : Copper Alloy
 - Forklock : Copper Alloy
 - Finish :
 - Terminal : Selected Gold on Contact Area, Gold Flash on Solder Tails, Both over 40u" Min. Ni Under-plated Overall
 - Forklock : Gold Flash Over 50u" Min. Ni Under-plated Overall.

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C	Dim.D
BCT20-PR058Z-05	5	5	15.5	8	13	14.25
BCT20-PR058Z-06	6	6	17.5	10	15	16.25
BCT20-PR058Z-07	7	7	19.5	12	17	18.25
BCT20-PR058Z-08	8	8	21.5	14	19	20.25
BCT20-PR058Z-09	9	9	23.5	16	21	22.25

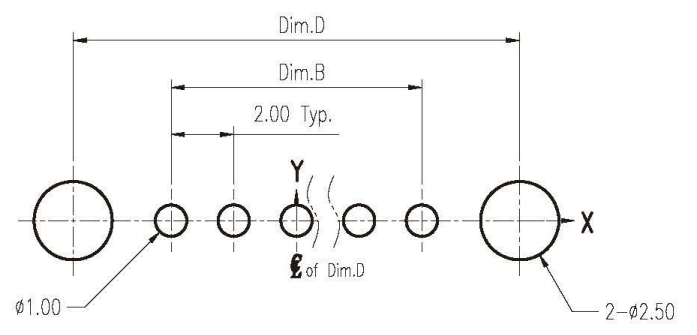

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

All Connectors
www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

RoHS Compliant


DRAWING BY CY
CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE
SIZE A4

TOLERANCES ARE
X ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

BCT20-PR058Z-xx-LF

SERIES MALE CLIP HIGH 5.80mm DIP 90° 05-09WAY LEADFREE

DESCRIPTION: 2.0mm Pitch Battery Conn. Male Type