

MATERIAL SPECIFICATION:

- HOUSING:LCP (UL94V-0) COLOR:BLACK
- CONTACT:COPPER ALLOY


ELECTRICAL PERFORMANCE

- RATED VOLTAGE(MAX.):30V AC/DC
- DIELECTRIC STRENGTH:1KV AC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL, NO BREAKDOWN
- INSULATION RESISTANCE:1000 MEGOHMS MIN. 500V DC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL
- OPERATING TEMPERATURE:-20' to +80'

ORDERING INFORMATION

BH 113F 03 U - B X
(1) (2) (3) (4)(5)

- SERIES NO.
113F: TYCO 3PIN BATTERY FEMALE
- NUMBER OF PIN
XX: XX POSITIONS
- TAIL CONSTRUCTION TYPE
U: SMD P.C.B FLITCH TYPE
- HOUSING COLOR CODE AND MATERIAL
B: COLOR:BLACK AND MATERIAL:LCP
- CONTACT PLATING
1: GOLD FLASH OVER ALL
2: 15u' GOLD OVER ALL
3: 30u' GOLD OVER ALL
4: 5u' GOLD OVER ALL

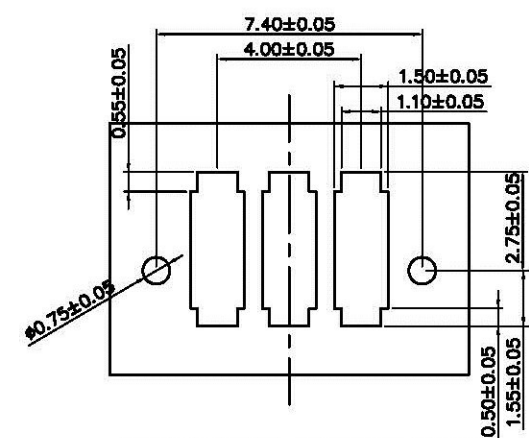

Recommended P.C.Board Layout

5				DRAWING:	GENERAL TOLERANCE			
4				<i>Match</i>	.X:±0.30	.X':=±2°		
3				CHECKED:	.XX:±0.15	.XX':=±1°	www.allconnectors.de Tel.: 0049 711 7009508 70794 Filzstätt - Germany info@allconnectors.de Fax: 0049 711 7009504 Kettnerstr. 25	
2				<i>Fahir</i>	.XXX:±0.05	.XXX':=±0.5°		
1				APPROVAL:	UNIT: MM	PROJECTION:	DESCRIPTION:	
				<i>Felicia</i>	SCALE: 1/1		2.0 PITCH 3 PIN BATTERY FEMALE	
NO.	DATE	DESCRIPTION	APPROVAL		SHEET: 1/1		PART NO:	BH113F03U-BX
1						DRAWING NO:	P1-BH113F03U-01	SIZE: A4