

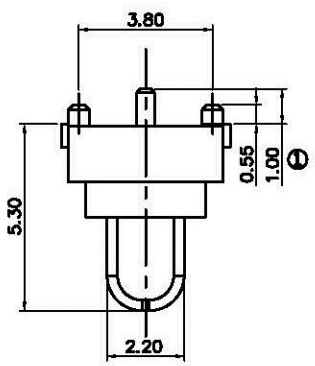
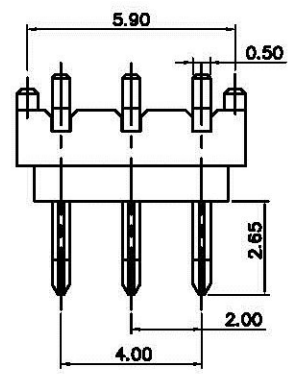



REV	ECN NO.
2.0	EC20100728002




ORDERING INFORMATION

BH 113M 03 U - B X
(1) (2) (3) (4)(5)

- SERIES NO.
113M: TYCO 3PIN BATTERY MALE
- NUMBER OF PIN
XX: XX POSITIONS
- TAIL CONSTRUCTION TYPE
U: SMD P.C.B FLITCH TYPE
- HOUSING COLOR CODE AND MATERIAL
B: COLOR:BLACK AND MATERIAL:LCP
- CONTACT PLATING
1: GOLD FLASH OVER ALL
2: 15u' GOLD OVER ALL
3: 30u' GOLD OVER ALL
4: 5u' GOLD OVER ALL

MATERIAL SPECIFICATION:
 1. HOUSING:PA9T (UL94V-0) COLOR:BLACK
 2. CONTACT:COPPER ALLOY

ELECTRICAL PERFORMANCE
 1. RATED VOLTAGE(MAX.):30V AC/DC
 2. DIELECTRIC STRENGTH:1KV AC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL, NO BREAKDOWN
 3. INSULATION RESISTANCE:1000 MEGOHMS MIN. 500V DC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL
 4. OPERATING TEMPERATURE:-20° to +80°

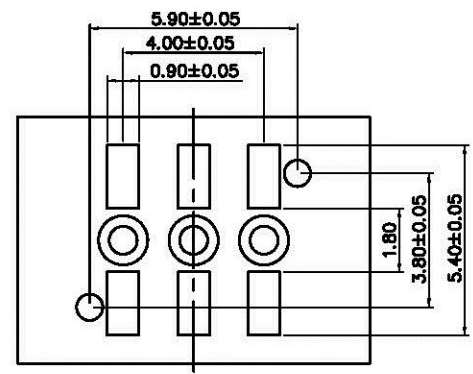

Recommended P.C.Board Layout

5				DRAWING:	GENERAL TOLERANCE		 www.allconnectors.de Tel.: 0049 711 7009503 70754 Hilderstadt - Germany info@allconnectors.de Fax: 0049 711 7009504 Kettenerstr. 25	
4				Match	.X: ±0.30	.X': ±2°		
3				CHECKED:	.XX: ±0.15	.XX': ±1°	UNIT: MM PROJECTION: 	
2				Fahj	.XXX: ±0.05	.XXX': ±0.5°		
1	10/07/28	修改端子脚长度	Felica	APPROVAL:	SCALE: 1/1	DESCRIPTION: 2.0 PITCH 3 PIN BATTERY MALE		
NO.	DATE	DESCRIPTION	APPROVAL	Felica	SHEET: 1/1			PART NO: BH113M03U-BX
						DRAWING NO: P1-BH113M03U-01	SIZE: A4	