


REV	ECN NO.
-----	---------

ORDERING INFORMATION

BH 118M 02 D - A X
 (1) (2) (3) (4)(5)

- SERIES NO.
118M: 2PIN BATTERY CONNECTOR MALE
- NUMBER OF PIN
02: 2 POSITIONS
- TAIL CONSTRUCTION TYPE
D: DIP TYPE
- HOUSING COLOR CODE AND MATERIAL
A: HOUSING:BLACK COLORS
MATERIAL:NYLON 9T
- CONTACT PLATING
1: GOLD FLASH OVER ALL
2: 15u" GOLD PLATING OVER ALL
3: 30u" GOLD PLATING OVER ALL

- MATERIAL SPECIFICATION:**
- HOUSING:NYLON 9T PLASTIC (UL94V-0) COLOR:BLACK
 - CONTACT:PHOSPHOR BRONZE
- ELECTRICAL PERFORMANCE**
- RATED VOLTAGE(MAX.): 250V AC/DC
 - RATED CURRENT(MAX.): 1.0A AC/DC
 - DIELECTRIC STRENGTH: 500V AC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL, NO BREAKDOWN
 - INSULATION RESISTANCE: 100 MEGOHMS MIN. 500V DC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL
 - CONTACT RESISTANCE: 30 MILLIOHM MAX.
 - OPERATING TEMPERATURE: -25° to +85°

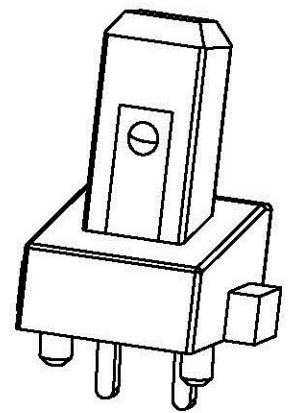

5			
4			
3			
2			
H 1	080704	C4.D4 DIMENSION CHANGE	Tahir
NO.	DATE	DESCRIPTION	APPROVAL

DRAWING:	GENERAL TOLERANCE
<i>Match</i>	X:±0.50 X°:±2° XX:±0.30 XX°:±1° XXX:±0.15 XXX°:±0.5°
CHECKED:	UNIT: MM PROJECTION:
APPROVAL:	SCALE: 1/1
	SHEET: 1/1

Allconnectors

www.allconnectors.de
 Tel.: 0049 711 700503
 70734 Dillendorf - Germany

Info@allconnectors.de
 Fax: 0049 711 700504
 Kettnerstr. 25

DESCRIPTION:
2Pin Battery Male DIP Type CONNECTOR

PART NO:	BH118M02D-AX	REV: 1.0
DRAWING NO:	P1BH118M02D-AX-01	SIZE: A4