

NOTES

1. MATERIALS: HOUSING-LCP 30%GF UL94V-0.
CONTACT-PHOSPHOR BRONZE C5191R-H.

All Connectors

www.allconnectors.de
Tel.: 0049 711 3001600
70754 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 3001604
Kellernstr. 25

RoHS Compliant

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PJECTION

TOLERANCES ARE


- X ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±



ORDER INFORMATION

BTH-VR-20-LF
SERIES | LEADFREE
CR 2032
REEL
180°SMT

DESCRIPTION: **BATTERY HOLDER SMT ASS'Y 2032**

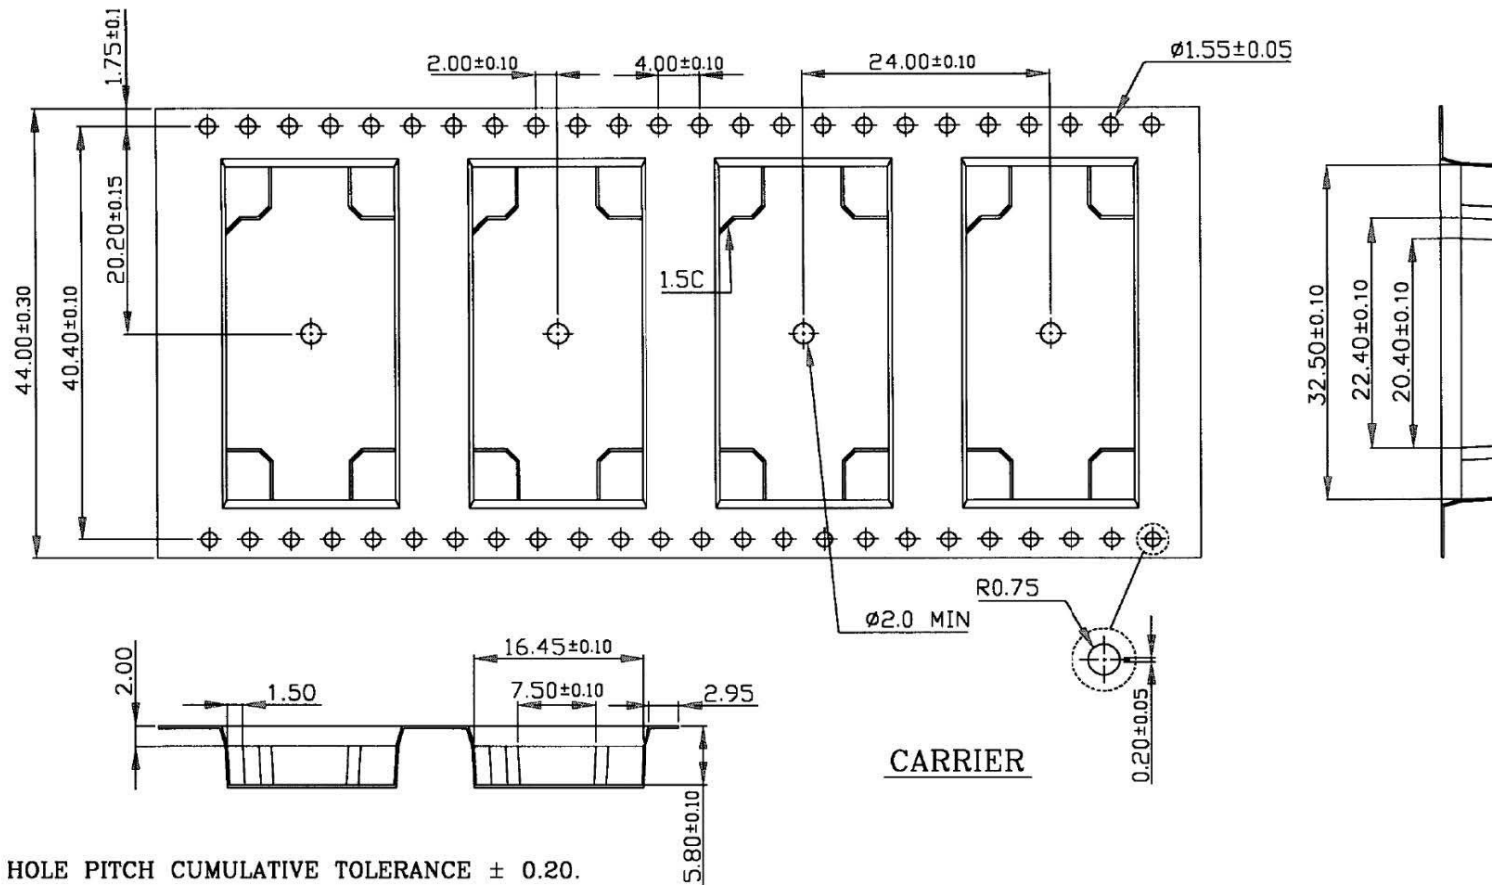

NOTE:

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20 .
- 2.CARRIER CAMBER IS WITHIN 1mm in 100mm.
- 3.MATERIAL:BLACK CONDUCTIVE POLYSTYRENE ALLOY (UP-5000)100% RECYCLABLE.
- 4.ALL DIMENSIONS MEET EIA-418-3 REQUIREMENTS.
- 5.THICKNESS:0.36±0.05mm.
- 6.PACKING LENGTH PER per 22" REEL:38.5 METERS.
- 7.COMPONENT LOAD PER 13"REEL: 500 PCS.
- 8.PEEL FORCE (300mm/min): 8mm: 30~100g
12~56mm: 30~100g

All Connectors

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7005503 Fax: 0049 711 7009504
70754 Filderstadt - Germany Kettnerstr. 25

RoHS Compliant

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT/mm	SCALE 1:1
DATE	
SIZE A4	PJECTION

TOLERANCES ARE

X ±
X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

BTH-VR-20-LF
SERIES | LEADFREE
CR 2032
REEL
180°SMT

DESCRIPTION: