

RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: Black Liquid Crystal Polymer





Processing

Max Processing Temp: 260 ° C for 6 seconds
 SMT Lead Coplanarity:
 (Ø.10mm)Ø04"max (10-50)
 (Ø.15mm)Ø06"max (52-100)

Ordering Code:

OPI02- X - A - X - X
 ① ② ③ ④ ⑤

- ① Series No:
- ② No. of Contact
04 TO 60
- ③ Connector Type
A: Locking Clip
- ④ Contact Plating
A: Gold Flash
E: 3u" Gold
B: 10u" Gold
C: 15u" Gold
- ⑤ Code Packing
A: Tube

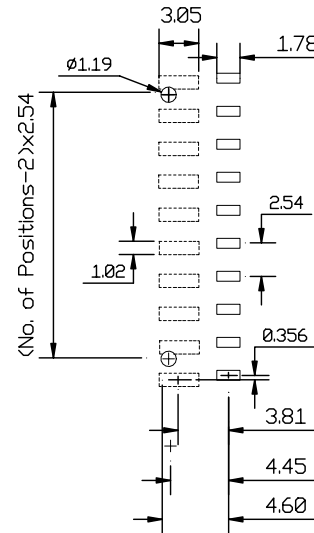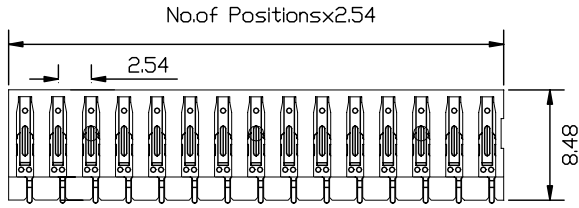

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG.
 0 ±0.25
 .0 ±0.2
 SCALE: AS SHOWN UNIT: mm

Allconnectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DRAWN	TITLE: 2.54mm One-Piece Interface
CHECKED	
APPROVED	DRAWN NO: OPI02-XXAX-1
DATE	PRODUCT NO. OPI02-XXAX

REV	DESCRIPTION	DATE
-----	-------------	------