
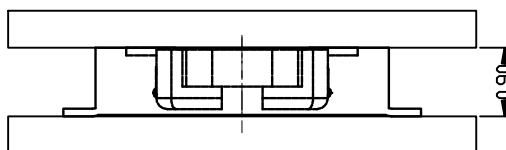
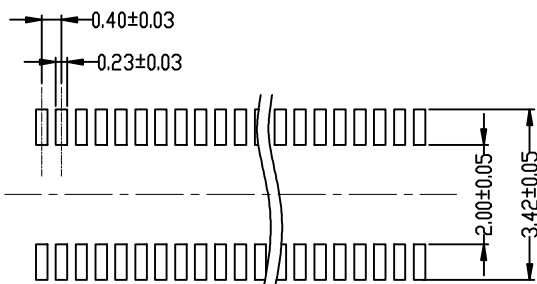



PIN NO.	A	B
24	5.95	4.40
30	7.15	5.60
40	9.15	7.60
50	11.15	9.60
60	13.15	11.60



RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

主要参数:

类型 公座

间距 0.4mm

合高 0.90mm

兼容品牌 广濑

兼容型号 DF30FB-***DP

配对型号 DF30FB-***DS

材料:

胶芯 材质: LCP ; **颜色:** 黑; **阻燃等级:** UL94V-0

接触端子 磷青铜

表面处理 内层: 镀镍 50u" ; 表层: 镀金3u"

电气特性:

额定电流 0.3A

绝缘电阻 500MΩ (DC125V 时)

耐压 150 Vac

接触电阻 70 mΩ 以下

工作温度 -40℃~+85℃


拔插次数 50 次

包装:

包装方式 编带

装数 5000pcs (1盘)

TOLERANCE
.0= ±0.10
.00= ±0.05
ANG.= ±2.0°



设计
审核
核准

2010/03/16

产品描述

CH002***

UNITS MM

SCALE

NONE

SIZE

A4

REV

A