


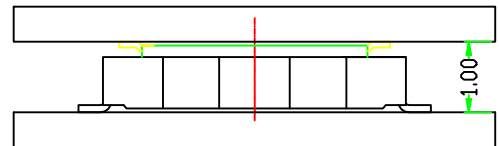


PIN NO.	A	B
20	6.08	3.60
24	6.88	4.40
34	8.88	6.40
44	10.88	8.40
50	12.08	9.60
54	12.88	10.40
60	14.08	11.60
70	16.08	13.60



0.40±0.03
0.23±0.03

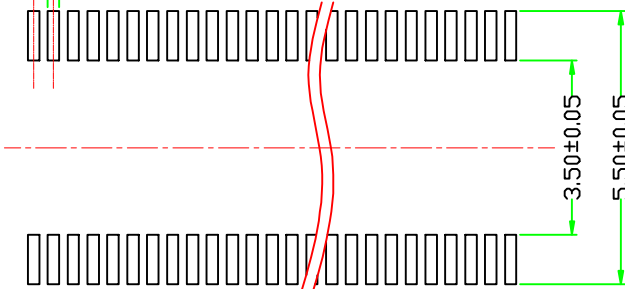

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

主要参数:

类型 母座

间距 0.4mm

合高 1.0mm

兼容品牌 京瓷

兼容型号 24 5805

配对型号 14 5805

材料:

胶芯 材质: LCP ; **颜色:** 黑; **阻燃等级:** UL94V-0

接触端子 磷青铜

表面处理 内层: 镀镍 50u"; 表层: 镀金3u"

电气特性:

额定电流 0.3A

绝缘电阻 500MΩ (DC125V 时)

耐压 150 Vac

接触电阻 70 mΩ 以下

工作温度 -40℃~+85℃


拔插次数 50 次

包装:

包装方式 编带

装数 4000pcs (1盘)

TOLERANCE
.0= ±0.10
.00= ±0.05
ANG.= ±2.0°



UNITS MM

设计
审核
核准

2009/10/22

产品描述

CH004***

SCALE

NONE

SIZE

A4

REV

A