
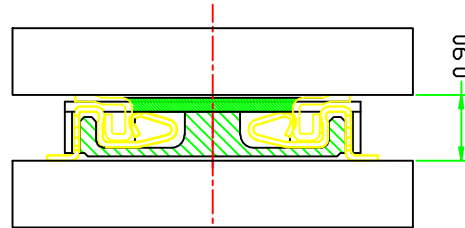
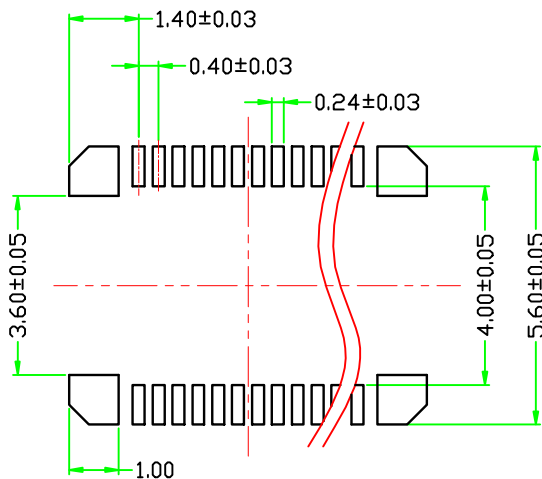



PIN NO.	A	B	C
16	5.66	4.20	2.80
20	6.46	5.00	3.60
26	7.66	6.20	4.80
24	7.26	5.80	4.40
30	8.46	7.00	5.60
34	9.26	7.80	5.40
40	10.46	9.00	7.60
50	12.46	11.00	9.60
60	14.46	13.00	11.60
70	16.46	15.00	13.60



RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

材料:

胶芯 材质: LCP ; 颜色: 黑; 阻燃等级: UL94V-0

接触端子磷青铜

表面处理 内层: 镀镍 50u" ; 表层: 镀金3u"

电气特性:

额定电流 0.3A

绝缘电阻500MΩ (DC125V 时)

耐压 150 Vac

接触电阻70 mΩ 以下

工作温度 -40℃~+85℃

拔插次数 50 次

包装:

包装方式 编带和吸塑盘

装数 6000pcs(1 盘)

主要参数:

类型 母座

间距 0.4mm

合高 0.9mm

形宽 4.4mm

兼容品牌 AXK

兼容型号 AXK7L

配对型号 AXK8L

TOLERANCE
0.= ±0.10
.0.= ±0.05
.00.= ±0.02
ANG.= ±2.0°



设计
审核
核准

2010/01/08

产品描述

CH018***



UNITS MM

SCALE

NONE

SIZE

A4

REV

A