


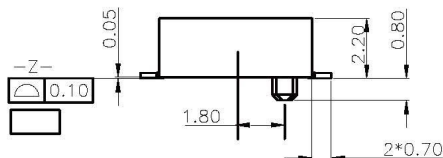


- NOTES:
- MATERIAL:
    - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:NATURAL.
    - CONTACT: COPPER ALLOY
  - FINISH:
    - CONTACT:
      - UNDERPLATING: 50u" MIN. NICKEL OVERALL.
      - FINISH:SEE ORDER INFORMATION.
  - REFLOW SOLDER CAPABLE TO 260°C
  - COPLANARITY 0.1 MM MAX. BASE ON DATUM A

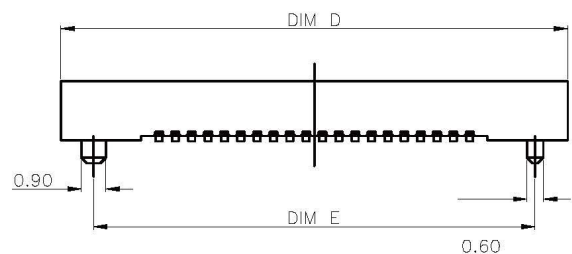

SECTION A-A

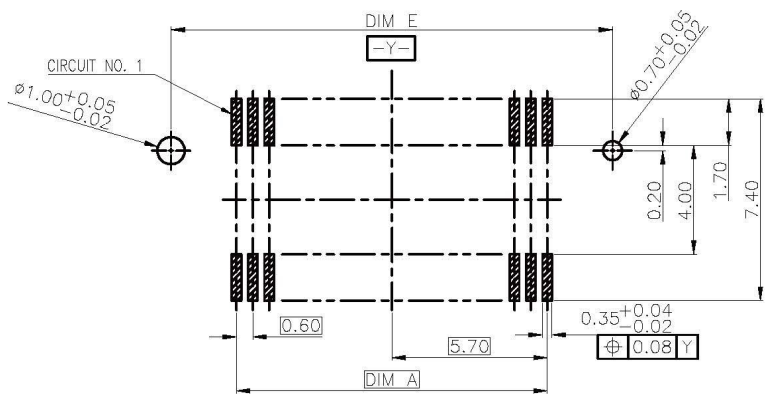

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE ±0.05

CKT	Dim A	Dim B	Dim C	Dim D	Dim E
40	11.4	14.8	17.05	18.6	16.2
60	17.4	20.8	23.05	24.6	22.2
80	23.4	26.8	29.05	30.6	28.2
90	26.4	29.8	32.05	33.6	31.2
100	29.4	32.8	35.05	36.6	34.2
120	35.4	38.8	41.05	42.6	40.2
140	41.4	44.8	47.05	48.6	46.2
160	47.4	50.8	53.05	54.6	52.2

**All Connectors**

www.allconnectors.de info@allconnectors.de  
Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
70794 Filderstadt - Germany Kettnerstr. 25

**RoHS Compliant**

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT/ mm SCALE 1:1  
DATE  
SIZE A4


TOLERANCES ARE

X ±  
.X ± 0.20  
.XX ± 0.10  
.XXX ±  
ANG ±

PJECTION



ORDER INFORMATION

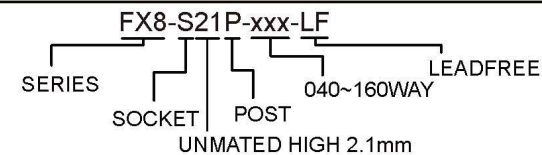

DESCRIPTION: 0.6mm BTB RCPT SMT S/T D/R TYPE