
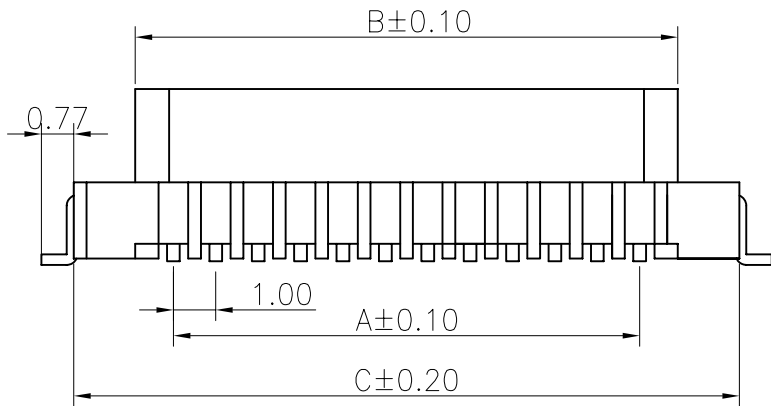


Specifications

Current Rating: 1.0 Ampere
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 LCP
 All materials must meet Greenconn requirement for environment protection

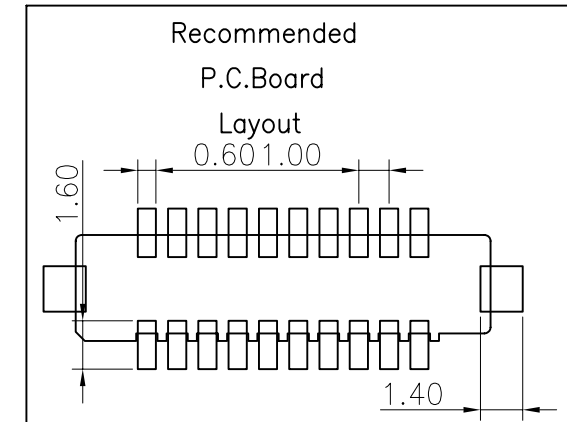

Ordering Information

BFGSV1 - XX XX 01 X

No. of Pins Per Row: 05-15
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Packing: Type Reel

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ±	X° ±5'	Andy2008.08.12		
.X ±0.38	.X° ±2'	CHECK DATE	FILE NAME (品名)	1.0mm Bord To Bord Female
.XX ±0.25	.XX° ±1'		PART NO (料号)	BFGSV1-XXXX01X
.XXX ±0.13	.XXX° ±0.5'	APPRO. DATE	DRAWING NO.(图号)	BFGSV1-01
UNIT:mm	SCALE 1:1			REV.A0
A4	SHEET: 1 of 1			