



**Specifications**  
 Current Rating: 1Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding: 300VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
**Materials**  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0 LCP or Equivalent materi.  
 All materials must meet Greenconn requirement for environment protection.

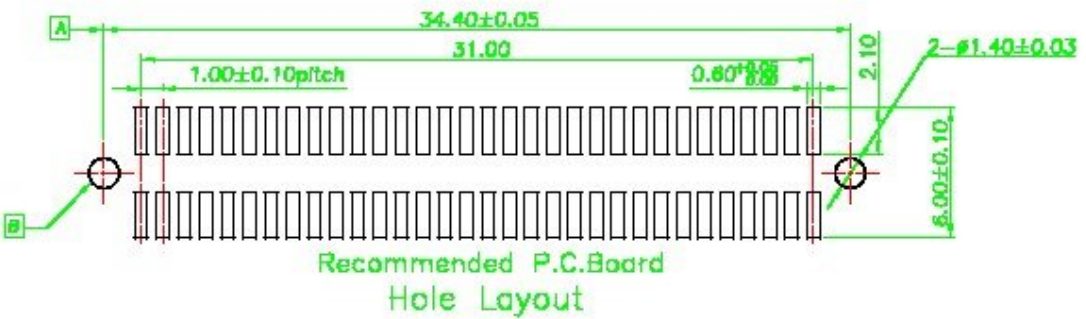

**Ordering Information**

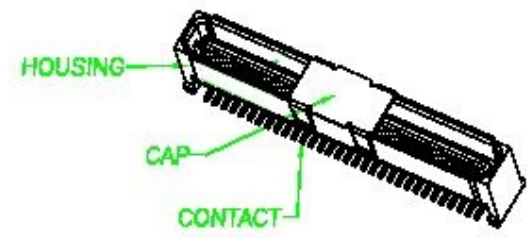

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE
X ±	X' ±5'	Andy2008.08.12	
.X ±0.30	X'' ±2'	CHECK	DATE
.XX ±0.25	XXX ±1'		
.XXX ±0.13	XXXX ±0.5'	APPRO.	DATE
UNIT:mm	SCALE 1:1		
A4	SHEET: 1 of 1		

<b>All Connectors</b>	
www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25	
FILE NAME (品名)	1.0mm Bord To Bord MALE
PART NO (料号)	BMGSV2-XXXX01X
DRAWING NO.(图号)	BMGSV2-01
	REV.A0