


1. 27mm PITCH BOX HEADER CONNECTOR, SHROUDED TERMINAL STRIP, DOUBLE ROW, VERTICAL, SMT, ROHS COMPLIANT

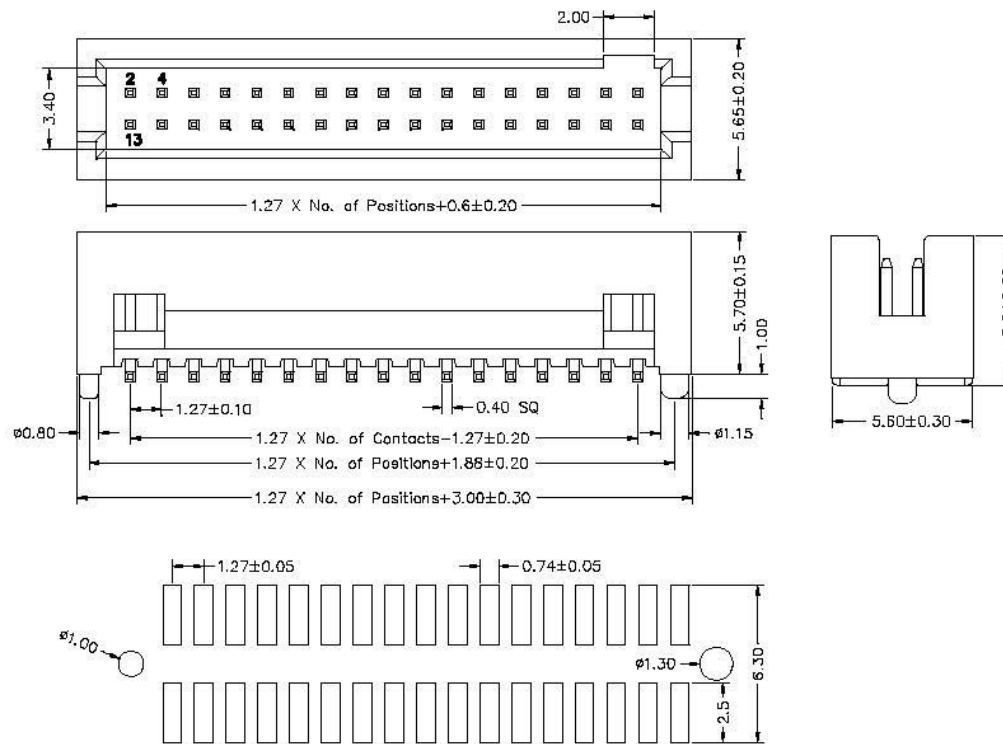

Recommended PCB Layout

Material Information:

Terminal: Phosphor bronze
 Insulator: PA6T+30%G. F, UL94V-0
 Plating: Au or Sn plated over 50 U" Ni
 All materials compliant with ROHS

Technical Specifications:

Current Rating: 1A
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000M Ωmin
 Dielectric Voltage: 500V AC/minute
 Operation Temperature: -40° C to +105° C

Ordering Information

CBM57 - XX 02 XX B2 X
 ① ② ③

- ① No. of Contacts: 10 To 100
- ② Plating Option:
 01: Gold Flash Over All
 03: 3U" Gold Plated Over All
 05: 5U" Gold Plated Over All
 0S: Tin Plated Over All
- ③ Packing Option:
 B: PE Bag D: Reel
 C: Tube E: Reel with Cap



www.allconnectors.de
 TEL: 0049 71 700510
 71734 Ellwangen Germany

1123 allconnectors.de
 TEL: 0049 71 700514
 Ellwangen DE

绘图 (DRAWN)

孙高田

投影 (PROJECT)



公差 (TOLERANCE)

料号 (PART NO)

CBM57-XX02XXB2X

审核 (CHECKED)

刘思晴

单位 (UNIT)

MM

0.0 ± 0.30

比例 (SCALE)

1:1

版本 (EDITION)

A

0.00 ± 0.20

核准 (APPROVE)

日期 (DATE)

2013/12/14

品名 (NAME)

1.27间距筒牛 双排 立贴