


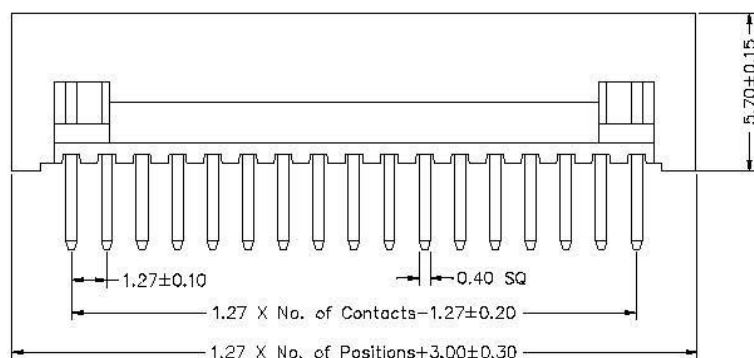


1. 27mm PITCH BOX HEADER, SHROUDED TERMINAL STRIP STRAIGHT, DOUBLE ROW, ROHS COMPLIANT

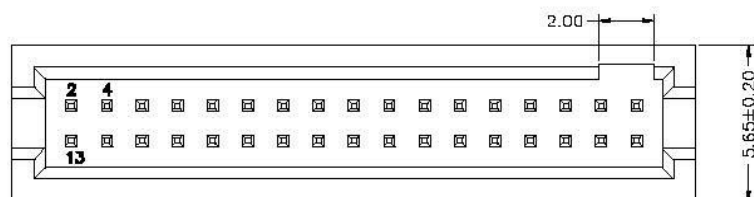

Recommended PCB Layout

Material Information:

Terminal: Brass
 Insulator: PA6T+30%G.F (UL94V-0)
 Plating: Au or Sn plated over 50 U" Ni
 All materials compliant with ROHS

Technical Specifications:

Current Rating: 1A
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000mΩ Min.
 Dielectric Voltage: 500V AC/minute
 Operation Temperature: -40° C to +105° C

Ordering Information

CBS57 - XX XX XX B1 X
 ① ② ③

- ① No. of Contacts: 10 To 100
- ② Plating Option:
 01: Gold Flash Over All
 03: 3U" Gold plated Over All
 05: 5U" Gold Plated Over All
 0S: Tin Plated Over All
- ③ Packing Option:
 A: Plastic Tray B: PE Bag
 C: Tube D: Reel



www.allconnectors.de info@allconnectors.de
 Tel: 0049 711 7003500 Fax: 0049 711 7003504
 All/24 | Liederstadt - Germany kettenstr. 25

绘图 (DRAWN)	孙高田	投影 (PROJECT)		公差 (TOLERANCE)	料号 (PART NO)	CBS57-XXXXXXB1X	
	审核 (CHECKED)	刘思晴	单位 (UNIT)				MM
	核准 (APPROVE)		比例 (SCALE)				1:1
		版本 (EDITION)	A	0.0 ± 0.30	品名 (NAME)	1.27筒牛 双排 180°	
		日期 (DATE)	2013/12/14	0.00 ± 0.20			