

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T (Processing temp. 260°C, 10sec)

RoHS Compliant


All Connectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettnerstr. 25


DRAWING BY CY	
CHECKED BY GENIUS	
UNIT/mm	SCALE 1:1
DATE	
SIZE A4	PJECTION

TOLERANCES ARE

X ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

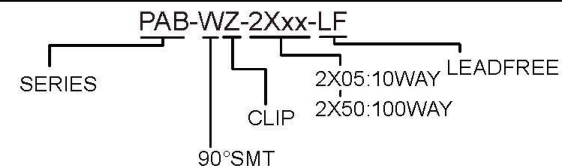

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS SMT TYPE SIDE ENTRY